

JC956 U.S. PTO  
10/26/00

10-27-00

LIMBACH & LIMBACH L.L.P.  
2001 Ferry Building, San Francisco, CA 94111  
415/433-4150

JC813 U.S. PTO  
10/26/00

Address to:

Box Patent Application  
Commissioner for Patents  
Washington, D.C. 20231

Attorney's Docket No. SONY-U0362

First Named Inventor AKIHIRO YAMADA

**UTILITY PATENT APPLICATION TRANSMITTAL**  
( under 37 CFR 1.53(b) )

SIR:

Transmitted herewith for filing is the patent application entitled:

GAME MACHINE SYSTEM, SERVER DEVICE, GAME EXECUTING DEVICE, DISPLAY DEVICE AND  
METHOD OF USING GAME

**CERTIFICATION UNDER 37 CFR § 1.10**

I hereby certify that this New Application and the documents referred to as enclosed herein are being deposited with the United States Postal Service on this date October 26, 2000, in an envelope bearing "Express Mail Post Office To Addressee" Mailing Label Number EL387334935US addressed to: Box Patent Application, Commissioner for Patents, Washington, D.C. 20231.

Joan Mazzeo

(Name of person mailing paper)

  
(Signature)

Enclosed are:

1. ☒ Transmittal Form (two copies required)
2. The papers required for filing date under CFR § 1.53(b):
  - i. 93 Pages of specification (including claims and abstract);
  - ii. 11 Sheets of drawings.  
☐ formal ☒ informal
3. Declaration or oath
  - a. ☒ Unsigned - Combined with Power of Attorney

**ACCOMPANYING APPLICATION PARTS**

4. ☐ An assignment of the invention to Sony Corporation is attached (including Form PTO-1595).
  - i. ☐ 37 CFR 3.73(b) Statement (when there is an assignee)
5. ☒ Power of Attorney -Unsigned - Combined with Declaration
6. ☐ An Information Disclosure Statement (IDS) is enclosed, including a PTO-1449 and copies of ☐ references.
7. ☒ Preliminary Amendment.
8. ☒ Return Receipt Postcard (MPEP 503 -- should be specifically itemized)
9. FOREIGN PRIORITY
  - [x] Priority of application no. P11-312073 filed on November 2, 1999 in Japan is claimed under 35 USC 119.

The certified copy of the priority application:

- ☒ is filed herewith; or  
☐ has been filed in prior application no. ☐ filed on ☐ or  
☐ will be provided.

☐ English Translation Document (if applicable)

# 10. FEE CALCULATION

- a. ☐ Amendment changing number of claims or deleting multiple dependencies is enclosed.

## CLAIMS AS FILED

	Number Filed	Number Extra	Rate	Basic Fee (\$710)
Total Claims	32 - 20	* 12	x \$18.00	216.00
Independent Claims	5 - 3	* 2	x \$80.00	160.00
<input type="checkbox"/> Multiple dependent claim(s), if any			\$270.00	0

\*If less than zero, enter "0".

Filing Fee Calculation . . . . . \$1,086.00

50% Filing Fee Reduction (if applicable) . . . . . \$

# 11. Small Entity Status

- a. ☐ A small entity statement is enclosed.  
b. ☐ A small entity statement was filed in the prior nonprovisional application and such status is still proper and desired.  
c. ☐ is no longer claimed.

# 12. Other Fees

- ☐ Recording Assignment [\$40.00] . . . . . \$  
☐ Other fees  
Specify \_\_\_\_\_ \$

Total Fees Enclosed . . . . . \$1,086.00

# 13. Payment of Fees

- ☒ Check(s) in the amount of \$ 1,086.00 enclosed.  
☐ Charge Account No. 12-1420 in the amount of \$ \_\_\_\_.  
**A duplicate of this transmittal is attached.**

# 14. All correspondence regarding this application should be forwarded to the undersigned attorney:

Charles P. Sammut  
Limbach & Limbach L.L.P.  
2001 Ferry Building  
San Francisco, CA 94111  
Telephone: 415/433-4150  
Facsimile: 415/433-8716

# 15. Authorization to Charge Additional Fees


- ☒ The Commissioner is hereby authorized to charge any additional fees (or credit any overpayment) associated with this communication and which may be required under 37 CFR § 1.16 or § 1.17 to Account No. 12-1420. **A duplicate of this transmittal is attached.**

LIMBACH & LIMBACH L.L.P.

October 26, 2000  
(Date)

Attorney Docket No. SONY-U0362  
[SOOP1362US00]

By:

  
Charles P. Sammut  
Registration No. 28,901  
Attorney(s) or Agent(s) for Applicant(s)

PATENT

-1-

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Application of	)	Group Art Unit: Unknown
	)	
AKIHIRO YAMADA	)	Examiner: Unknown
	)	
Application No. Not Assigned	)	<u>PRELIMINARY AMENDMENT</u>
	)	
Filed: Herewith	)	2001 Ferry Bldg.
	)	San Francisco, CA 94111
For: GAME MACHINE SYSTEM,	)	Ph.: 415-433-4150
SERVER DEVICE, GAME	)	
EXECUTING DEVICE,	)	
DISPLAY DEVICE AND	)	
METHOD OF USING GAME	)	
	)	
	)	

Assistant Commissioner for Patents  
Washington, D.C. 20231

Sir:

Prior to examination of the above-identified application, please enter the following amendments:

In the Specification

Page 15, line 5, please change "Fig. 2 is a schematic diagram" to  
--Figs. 2A and 2B are schematic diagrams--;

Page 16, line 21, please change "Fig. 2 is a schematic diagram" to  
--Figs. 2A and 2B are schematic diagrams--.

REMARKS

The amendments to the specification and drawings are to conform the drawings to the specification, to conform the specification to the drawings


and/or correct typographical errors. It is respectfully submitted that such amendments are supported by the specification, claims, abstract of the disclosure and the drawings.

The Examiner's early examination and consideration are respectfully requested.

Respectfully submitted,

LIMBACH & LIMBACH L.L.P.

By:



Charles P. Sammut

Reg. No. 28,901

October 26, 2000

Our File: SONY-U0362

- 1 -

GAME MACHINE SYSTEM, SERVER DEVICE, GAME EXECUTING DEVICE,  
DISPLAY DEVICE AND METHOD OF USING GAME

BACKGROUND OF THE INVENTION

1. Field of the Invention

The present invention relates to a game machine system for use at home to enjoy various games presented by game software information generally called television games or computer games, and to a server device, a game executing device, and a display device used in the game machine system, and also to a game usage method which allows a wide variety of games using the game machine system.

2. Description of the Related Art

Among various home-use electronic devices, game machines are becoming increasingly popular. A typical game machine executes a game in accordance with game software information stored on a storage medium such as a CD-ROM (compact disk ROM) or a DVD (digital video disk) wherein a game image is displayed on a television receiver connected to the game machine in accordance with a control command issued by a user thereby allowing the user to enjoy the game.

The various kinds of game software information provided via a storage medium such as a CD-ROM or a DVD includes a game control program and display data used to form a game

screen in accordance with the game control program. Typically, the game machine is made up of a main part and a control unit. The main unit includes a drive of a storage medium such as a CD-ROM or a DVD, a CPU, a ROM, and a RAM and serves to execute a game in accordance with game software information stored on a storage medium. The control unit is usually called a game controller and servers to input a command given by a user.

In accordance with a game control program which is read from the storage medium and executed, and in response to a command given by the user via the control unit, the main unit of the game machine generates a game image using image data included in the game software information. The game image is supplied to a monitor device such as a television receiver connected to the main unit of the game machine and is displayed thereon. Thus, the user can enjoy the game.

By replacing the storage medium such as a CD-ROM on which game software information is stored with another storage medium, it is possible to enjoy various games such as role-playing games, action games, and simulation games. Thus, game machines are now widely used at home by a large number of users.

Game software information is generally supplied in the form of a software package in which game software is stored on a storage medium such as a CD-ROM or a DVD. Therefore,

game machines are necessary to have a drive for reading game software information stored on a storage medium. This results in an increase in the cost of the game machines.

Therefore, to enjoy a game supplied in the form of game software information at home, a user has to buy an expensive game machine and a storage medium on which desired game software information is stored. Furthermore, to enjoy various different games, it is necessary to buy a large number of storage media on which game software information is stored.

As described above, the problem for users who want to enjoy games at home is that it is necessary to buy an expensive game machine and storage media including game software information stored thereon. Thus there is an increasing need for a game machine system which allows users to easily enjoy games at lower cost.

One possible technique to meet the above requirement is to connect a game machine to an external server via a communication network such as the Internet so as to obtain game software information stored in the server by getting access thereto. This makes it unnecessary for home-use game machines to have a drive of storage medium such as a CD-ROM or a DVD, and thus a reduction in the cost of game machines can be achieved.

However, the transmission capacity of communication

networks is generally low. This makes impossible to display game images including quick motions at a desirable high speed, and thus users cannot sufficiently enjoy games. Another problem is that it is necessary to maintain the connection of the communication line between the game machine at home and the external server device, and thus an expensive communication cost is required.

#### SUMMARY OF THE INVENTION

In view of the above, it is an object of the present invention to provide a game machine system which allows a user to easily use a game presented by game software information at low cost. It is another object of the present invention to provide a server device, a game executing device, and a display device used in the game machine system. It is still another object of the present invention to provide a game usage method using the game machine system.

According to an aspect of the present invention, there is provided a game machine system comprising a server device, a display device, and a game executing device, which are connected to each other via a digital communication line, the server device comprising: information storage unit for storing game software information including a game control program and display data used to form a game screen in



accordance with the game control program; game software information acquisition means for acquiring the game software information which is provided by means of broadcasting or via a dedicated communication line and storing the acquired game software information in the information storage unit; and information transmitting means for reading necessary information from the information storage unit in response to a request received via the digital communication line and transmitting the information over the digital communication line, the game executing device comprising: game selection command input means for inputting a game selection command to select a specified game; a game selection request transmission means for transmitting, over said digital communication line, a game selection request for selection of the game specified by said game selection command input via said game selection command input means; game control command input means for inputting a game control command; information request transmission means for transmitting, over said digital communication line, an information request for providing necessary information in accordance with the game control program specified by said game selection command and in accordance with the game control command input via said game control command input means; information acquisition means for acquiring necessary information from the information

received via the digital communication line; and image generation means for generating an image in accordance with game display data included in the information acquired via the information acquisition means and transmitting the image information representing the generated image over the digital communication line, the display device comprising: image information acquisition means for acquiring image information transmitted via the digital communication line; and image displaying means for displaying an image in accordance with the image information acquired the said image information acquisition means.

In this game machine system, the server device, the display device, and the game executing device are connected to each other via the digital communication line so as to form the game machine system. Game software information is supplied via a communication medium having a high transmission capacity such as digital satellite broadcasting, digital ground-wave broadcasting, or a dedicated communication line. The game software information is acquired by the game software information acquisition means of the server device and stored in the information storage unit of the server device.

The game software information stored in the information storage unit of the server device is supplied to the game executing device via the digital communication line in

response to a request issued by the game executing device. In the game executing device, a game image is generated in accordance with the supplied information and the resultant image is output over the digital communication line to supply it to the display device. Thus, the game image is displayed on the display device, thereby making it possible for the user to enjoy the game.

As described above, the game executing device executes a game using the game software information stored in the information storage unit of the server device, and thus it is not necessary for the game executing device to include a drive for driving a storage medium on which game software information is stored. Therefore, the cost of the game executing device becomes low.

Because the server device can acquire game software information via the broadcasting or the dedicated communication line, it not necessary to purchase a so-called packaged medium on which game software information is stored. This makes is possible to easily obtain game software information and enjoy it. That is, it is possible to obtain game software information at low cost without having to go out to visit a shop, and enjoy the game in accordance with the game software information obtained.

In this game machine system according to the present invention, the image information acquisition means of the

display device is capable of acquiring data-compressed image information transmitted from the server device over the digital communication line and also image information generated, data-compressed, and transmitted over the digital communication line by the game executing device, and the display device may further comprise: decompression means for decompressing the data-compressed image information acquired by the image information acquisition means; and image synthesizing means for synthesizing an image from the image represented by the image information which has been received from the server device and then decompressed by the decompression means and the image represented by the image information which has been generated by the game executing device and then decompressed by the decompression means.

In this game machine system, the display device includes the decompressing means and the image synthesizing means whereby image data such as a background image is acquired directly from the server device and decompressed, and the resultant decompressed image data is combined, by the image synthesizing means, with the image such as a character image generated by the game executing device. The synthesized image is displayed on the display device.

This allows the game image to be displayed at a high speed, and thus it becomes possible to present a high-quality game image including quick motions at low cost.

In this game machine system according to the present invention, the server device may further include: additional information acquisition means for acquiring additional information associated with selectable information used in a game and storing the additional information in the information storage unit, the additional information being supplied by means of broadcasting or via a dedicated communication line; and additional information transmission means for reading the information acquired as the additional information in response to an additional information providing request received via the digital communication line and then transmitting the information over the digital communication line instead of the original information used in the game, and the game executing device may further include: additional information selection command input means for inputting an additional information selection command specifying additional information to be used instead of selectable information used in the game; and additional information request transmission means for transmitting a request for additional information specified by the additional information selection command input via the additional information selection command input means, over the digital communication line.

Thus, in this game machine system, the additional information acquisition means of the server device acquires

additional information supplied by means of broadcasting or via the dedicated communication line, and the acquired additional information is stored in the information storage unit. Herein, the additional information is selectable information such as data representing characters, data representing background images, information representing the colors of characters, information representing the colors of background images, and voice data, which can be selected and used in games.

The additional information request transmission means of the server device transmits, via the digital communication line, additional information specified by the additional information request transmitted by the additional information request transmission means of the game executing device via the digital communication line, so as to use the additional information instead of the current selectable information.

That is, by employing additional information associated with selectable information such as character data used in the game instead of the current data, it is possible to modify the characters, the background image, and the voices into forms desired by the user. Because the additional information is supplied by the game software information provider, it is possible to obtain and use a wide variety of additional information.

Furthermore, in the game machine system according to the present invention, one of devices connected to said digital communication line preferably includes: communication line connecting means for connecting a communication line with the game software information provider in response to a command issued by the user; and information request transmission means for transmitting, in response to a command issued by the user, a request for desired information to the game software information provider via the communication line connected by the communication line connecting means.

In this game machine system, the communication line connecting means makes a connection between the game software information provider and the game machine system via a communication line. After establishing the connection via the communication line, an information providing request for providing game software information or additional information desired by the user is transmitted in response to a command issued by the user to the game software information provider via the communication line.

Upon reception of the information providing request transmitted via the communication line, the game software information provider transmits the requested game software information or additional information by means of broadcasting or via the dedicated communication line. This

allows the user to easily acquire desired game software information or additional information at low cost, when the user needs it.

Furthermore, in the game machine system according to the present invention, one of devices connected to the digital communication line preferably includes: a usage history information storage unit for storing information about the history of usage of games; usage history information updating means for updating the information about the history of usage of games stored in the usage history information storage unit, when the game selection command transmission means of the game executing device has transmitted a game selection command, thereby making it possible to perform accounting in accordance with the usage history information stored in the usage history information storage unit.

Thus, in this game machine system, when the game selection command transmission means transmits a game selection command, the information about the history of usage of games stored in the usage history information storage unit is updated, so that accounting can be performed in accordance with the usage history information stored in the usage history information storage unit.

The information identifying games and the information representing the number of times the games have been used



may be employed as the usage history information. This makes it possible to perform accounting in accordance with the number of times the games have been used. That is, it becomes possible to charge the fee even for one-time use of a game, thereby allowing the user to enjoy games on a pay-per-play basis in a similar manner as if the user were enjoying games in an amusement arcade.

In the game machine system according to the present invention, one of devices connected to the digital communication line preferably includes: communication line connecting means for connecting a communication line with the game software information provider; usage history information transmission means for transmitting the usage history information stored in the usage history information storage unit via the communication line, at a scheduled time or in response to a usage history information transmission request transmitted from the game software information provider via the communication line.

In this game machine system, the usage history information stored in the usage history information storage unit is transmitted from the game machine system to the game software information provider via the communication line, at the scheduled time or in response to a usage history information transmission request transmitted from the game software information provider via the communication line.

This makes it possible for the game software information provider to correctly and reasonably perform the accounting process in accordance with the usage history information transmitted from the game machine system.

Furthermore, in the game machine system according to the present invention, the digital communication line may include a digital serial bus.

In this case, all devices or some particular devices in the game machine system may be connected via a digital serial bus according to, for example, the IEEE-1394 standard or the USB-2.0 standard.

This allows various kinds of data such as image data to be transmitted at a high speed between the devices connected via the digital serial bus.

Furthermore, in the game machine system according to the present invention, the digital communication line may include a wireless communication channel.

In this game machine system, all devices or some particular devices in the game machine system are connected via the wireless communication channel. This allows devices to be connected without having to use complicated cables which would be obstructive and which would limit the locations of the devices connected to the digital communication line.

#### BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a schematic diagram illustrating an embodiment of a game machine system according to the present invention;

Fig. 2 is a schematic diagram illustrating connections among various devices in the game machine system according to the embodiment of the present invention;

Fig. 3 is a block diagram illustrating a game machine in the game machine system shown in Fig. 1, according to the embodiment of the present invention;

Fig. 4 is a block diagram illustrating an STB (set top box) in the game machine system shown in Fig. 1, according to the embodiment of the present invention;

Fig. 5 is a block diagram illustrating a television receiver in the game machine system shown in Fig. 1, according to the embodiment of the present invention;

Fig. 6 is flow chart illustrating the operation of the game machine system shown in Fig. 1, according to the embodiment of the present invention;

Fig. 7 is a schematic diagram illustrating another embodiment of a game machine system according to the present invention;

Fig. 8 is a block diagram illustrating a game machine in the game machine system shown in Fig. 7, according to the embodiment of the present invention;

Fig. 9 is a block diagram illustrating a wireless communication processing unit in the game machine shown in Fig. 8, according to the embodiment of the present invention;

Fig. 10 is a block diagram illustrating an STB (set top box) in the game machine system shown in Fig. 7, according to the embodiment of the present invention; and

Fig. 11 is a block diagram illustrating a television receiver in the game machine system shown in Fig. 7, according to the embodiment of the present invention.

#### DESCRIPTION OF THE PREFERRED EMBODIMENTS

The game machine system, the server device the game executing device, the display device, and the method of using a game according to the present invention are described in further detail below with reference to preferred embodiments in conjunction with the accompanying drawings.

##### First Embodiment

Fig. 1 is a schematic diagram illustrating a first embodiment of a game machine system using a game usage method according to the present invention. Fig. 2 is a schematic diagram illustrating connections among various devices in the game machine system of the first embodiment.

In this first embodiment, as shown in Fig. 1, the game machine system (home network system) includes a game machine 1 serving as the game executing device according to the present invention, a set top box (hereinafter referred to as an STB) 2 which is a digital satellite broadcasting receiver and which serves as the server device according to the present invention, a television receiver 3 serving as the display device according to the present invention, wherein these devices are connected to each other via a digital serial bus according to the IEEE-1394 standard (hereinafter referred to simply as a digital bus) serving as the digital communication line.

That is, in this first embodiment, the game machine 1, the STB 2, and the television receiver 3 each include a digital input/output terminal and a digital interface circuit according to the IEEE-1394 standard. Furthermore, in this first embodiment, as shown in Fig. 1, the digital input/output terminal 1d of the game machine 1 and the digital input/output terminal 3d1 of the television receiver are connected to each other via a digital bus 41, and the digital input/output terminal 2d of the STB 2 and the digital input/output terminal 3d2 of the television receiver 3 are connected to each other via a digital bus 42 thereby forming a home network system.

The connections among the respective parts of the game

machine system according to this first embodiment are illustrated in a simpler fashion in Fig. 2A to provide an easier understanding. That is, as shown in Fig. 2A, the game machine 1 and the STB 2 are connected to the television receiver 3. The connections, illustrated in Fig. 2A, among the respective parts via the digital bus are equivalent to the connections among them via a single digital bus 4 shown in Fig. 2B.

Thus, in this game machine system according to the first embodiment, information can be transmitted/received not only between the game machine 1 and the television receiver 3 and between the STB 2 and the television receiver 3 but also between the game machine 1 and the STB 2 via the digital bus 4.

In this first embodiment, game control programs and game software information including image information representing game images or moving image information are not supplied via packaged media such as a CD-ROM or a DVD. Instead, in this first embodiment, game software information is received using the STB 2 via digital satellite broadcasting, as will be described later. The received game software information is stored on a hard disk included in the STB 2.

The game software information stored on the hard disk of the STB 2 is used by the game machine 1 to execute a game.

The game machine 1 also includes a modem and is connected, via a communication line, to a game provider which provides game software. If the game provider receives a request for particular game software information, from the game machine 1 via the communication line, the game provider 1 supplies the requested game software information via the broadcasting media.

This makes it unnecessary for the game machine to have a drive of a storage medium such as a CD-ROM or a DVD. Thus, it becomes possible to realize a game machine in a simpler fashion, which results in a reduction in cost.

Conventionally, a game machine is made up of a main part including a CD-ROM drive or a DVD drive and a control unit called a game controller. In contrast, in the present embodiment, as shown in Fig. 1, all functions needed for games are implemented on the control unit similar to the conventional game controller.

The game provider accepts a request for particular game software information, and supplies the requested game software information via the broadcasting medium. This allows a wide variety of game software information to be supplied to a large number of users at low cost.

In the game machine system according to the first embodiment, as shown in Fig. 1, the game machine 1 is also connected to a camera/microphone unit 8 including a CCD

camera 81 and a microphone 82. The camera/microphone unit 8 is used to input information which is needed to change characters or voices used in games into desired ones. The modification of characters or voices can makes games more enjoyable.

#### Devices Making Up the Game Machine System

Various devices making up the game machine system according to the first embodiment are described below.

#### Game Machine

Fig. 3 is a block diagram illustrating the game machine according to the first embodiment. In this first embodiment, as shown in Fig. 3, the game machine includes an I/O processor 13, an IEEE-1394 interface circuit 14, a CPU 15, a graphic synthesizer 16, a ROM 17, a RAM 18, and a modem 19, wherein these parts are connected to each other via a CPU bus 20.

The CPU 15 and the graphic synthesizer 16 also have a direct connection with each other so that the CPU 15 can directly control the graphic synthesizer 16. The I/O processor 13 is connected to a control unit 11 and a camera/microphone unit 12.

The control unit 11 is used by a user to input various commands during games. The camera/microphone unit 12 is



used to input an image or a voice to be used in a game instead of a current character or voice.

The I/O processor 13 serves as an interface between the game machine 1 and the control unit 1 and the camera/microphone unit 12 so that data output from the control unit 11 or the camera/microphone unit 12 can be input to the game machine 1 via the I/O processor 13.

As described above, the game machine 1 includes the IEEE-1394 interface circuit 14 to transmit/receive various kinds of information to/from the STB 2 or the television receiver 3 connected via the digital bus 4. The use of the digital interface according to the IEEE-1394 standard allows information including a large amount of data, such as image or voice information, to be transmitted between devices connected to the digital bus at a high speed.

In the game machine 1 according to the first embodiment, a processing program and various data required to realize the basis functions of the game machine 1 are stored in the ROM 17. The RAM 18 is used to store a game control program and image data representing a game image supplied from the STB 2 via the digital bus 4 as will be described later. The RAM 18 is also used as a work area for various kinds of processing.

The graphic synthesizer 16 performs graphic processing such as character rendering to generate a game image. The

CPU 15 controls the various parts of the game machine 1. For example, during a game, the CPU 15 generates a game image using the graphic synthesizer 17 and other parts in accordance with the game control program supplied from the STB 2 and also in accordance with commands input by the user via the control unit 11.

The CPU 15 also controls the graphic synthesizer 16 and the IEEE-1394 interface circuit 14 such that the data of the image generated using the graphic synthesizer 16 is compressed according to the MPEG standard and transmitted via the IEEE-1394 interface circuit 14 over the digital bus 4 according to the AV protocol. In the present embodiment, the compression of the data of the generated image is performed by the graphic synthesizer 16.

The game machine 1 can control the STB 2 and the television receiver 3 connected to the digital bus 4, using AV/C commands defined in the IEEE-1394 standard regarding the digital interface.

The game machine 1 of this first embodiment also includes the modem 19 for making a connection with the game provider via a communication line thereby making it possible to communicate with the game software information provide. More specifically, via the communication line connected by the modem 19, the game machine 1 can transmit a game selection menu transmission request to the game provider and

can receive a game selection menu returned from the game provider.

That is, the game machine 1 of this first embodiment connects the communication line to the server in the game provider in accordance with the basis program stored in the ROM 17 and in response to a command given by the user and transmits a game selection menu transmission request together with a password and/or user identification information to the server of the game provider via the communication line.

If the server in the game provider receives the game selection menu transmission request via the communication line, the server performs authentication. If the password and the user identification information pass the authentication, a game selection menu representing available games (in the form of a list) is transmitted from the server of the game provider to the game machine 1 via the communication line connected between the game machine 1 and the server of the game provider.

If the game machine 1 receives the game selection menu from the game provider, the game machine 1 supplies the received game selection menu to the television receiver 3 via the digital bus 4. The television receiver 3 displays the received game selection menu on the display device thereof.

If the user of the game machine 1 selects a desired game from the game selection menu displayed on the display device of the television receiver 3, by operating the control unit 11 of the game machine 1, a request for transmission of the selected game is transmitted to the game provider via the communication line connected between the server of the game provider and the game machine 1.

In the above game selection process, the game selection menu displayed on the television receiver 3 may be scrolled in response to an operation of the control unit 11 thereby allowing the user to select a desired game.

Upon reception of the game transmission request, the game provider transmits the game software information of the requested game to the game machine 1 via a broadcasting medium such as digital satellite broadcasting or ground-wave broadcasting. The game software information transmitted from the game provider is received by the STB 2 in the game machine system according to the present embodiment, and stored on the hard disk (information storage unit) of the STB 2 so that the game machine 1 can use the game software information.

When the game software information of the game selected by the user of the game machine 1 has been completely stored on the hard disk of the of the STB 2, a message is transmitted to the server of the game provider via the

communication line connected between the game machine 1 and the server of the game provider to notify the server of the game provider that the storage of the game soft information has been completed. In response, the server of the game provider performs an accounting process.

In this first embodiment, as described above, a request for game software information is transmitted to the game provider, and the game provider transmits the requested game software information via digital satellite broadcasting. The game software information transmitted via the digital satellite broadcasting is received and stored by the STB 2 connected to the game machine 1 via the digital bus 4. Thus, it becomes possible for the game machine 1 to use the game software information stored in the STB 2.

STB (Set Top Box)

Fig. 4 is a block diagram illustrating the STB 2 of the game machine system according to the first embodiment. Digital satellite broadcasting signals are received via an antenna 21 and transferred to a tuner 22. The tuner 22 selects a particular digital satellite broadcasting signal in accordance with a selection control signal supplied from a controller 100. The selected digital satellite broadcasting signal is demodulated and supplied to the descrambler 23. In the above operation, the selection

control signal is generated by the controller 100 in accordance with a selection command issued by a user via a keypad 28 of the STB 2.

The descrambler 23 descrambles the scrambled (encrypted) digital satellite broadcasting signal, using encryption key information. The encryption key information used in this descrambling process may be stored in advance, for example, in the ROM 102 of the STB 2.

After being descrambled by the descrambler 23, the digital satellite broadcasting signal is supplied to a demultiplexer 24, which in turn extracts a video signal and an audio signal of a broadcasting program according to the selection control signal supplied from the controller 100. The extracted signal is supplied to an A/V signal processing circuit 25.

In the digital satellite broadcasting, MPEG-compressed signals of a plurality of broadcasting programs are multiplexed into a digital satellite broadcasting signal and broadcasted via a single channel. From the multiplexed signal, the demultiplexer 24 extracts the video signal and the audio signal of the broadcasting program specified by the selection control signal generated in accordance with the selection command issued by the user via the keypad 28 of the control unit 10.

In order for the user to easily and quickly select a

desired broadcasting program, an electronic program table of digital satellite broadcasting programs is displayed on the screen of the television receiver so as to present to the user a list of broadcasting programs multiplexed on the selected digital satellite broadcasting signal.

The A/V signal processing circuit 25 decompresses the compressed video signal and audio signal and thereby reproducing the original video signal and audio signal. Furthermore, an analog video signal to be supplied to an analog monitor device is generated from the decompressed digital video signal, and an analog audio signal to be supplied to a loudspeaker is generated from the decompressed audio signal.

The analog video signal generated by the A/V signal processing circuit 25 is output via an video signal output terminal 25Vd and supplied to the analog monitor device which in turn displays the image of the digital satellite broadcasting program on the display device of the analog monitor device. On the other hand, the analog audio signal generated by the A/V signal processing circuit 25 is output via an audio signal output terminal 25Au and supplied to the loudspeaker which in turn generates a voice/sound of the digital satellite broadcasting program.

In this first embodiment, the STB 2 has the capability of outputting the selected and descrambled digital satellite

broadcasting signal over the digital bus via the IEEE-1394 interface circuit and/or storing it on a hard disk driven by the hard disk drive disposed in the STB 2.

That is, the descrambled digital satellite broadcasting signal output from the descrambler 23 is output via the IEEE-1394 interface circuit 26 and further via the digital output terminal 2d and supplied to an electronic device connected to the digital bus.

If the user sets the STB 2 into a record mode by operating the keypad 28 of the STB 2, the scrambled digital satellite broadcasting signal output from the descrambler 23 is supplied to the hard disk drive 29 via the interface circuit 104, the CPU bus 106, and the interface circuit 105.

The hard disk drive 29 has the capability of writing/reading data to/from the hard disk. In the record mode, the data supplied via the interface circuit 105 is stored on the hard disk in accordance with a control signal supplied from the controller 100.

That is, when a digital satellite broadcasting signal carrying game software information transmitted from the game provider is selected by the STB 2, and if the STB 2 is set in the record mode, the game software information, transmitted by means of the digital satellite broadcasting from the game provider in response to the game software information providing request transmitted from the user via



the telephone line, is received and stored on the hard disk of the hard disk drive 29.

In this first embodiment, if the game software information received via the digital satellite broadcasting is scrambled, it is descrambled using encryption key information (authorization information) which is provided from the game provider via the communication line and via the modem 19 of the game machine 1.

If a request transmitted by the game machine 1 via the digital bus 4 is received via the digital input/output terminal 2d and further via the IEEE-1394 interface circuit 26, the controller 100 controls the hard disk drive 29 and reads a game control program or image data for generating a game image from the hard disk of the hard disk drive 29 and supplies the game control program or the image data to the game machine 1 or the television receiver 3 via the digital bus 4.

In this case, the data of interest read from the hard disk of the hard disk drive 29 is transmitted over the digital bus 4 via the interface circuit 105, the controller 100, the interface circuit 104, the IEEE-1394 interface circuit 26, and the digital input/output terminal 2d.

As described above, game software information supplied by means of digital satellite broadcasting is received and stored by the STB 2, and the game machine 1 uses the game

software information stored in the STB 2 thereby allowing the user to enjoy the game.

In the present embodiment, when the STB 2 receives digital data such as a digital satellite broadcasting signal via the digital bus 4 and further via the IEEE-1394 interface circuit 26, the STB 2 can reproduce it. Furthermore, the STB 2 can also reproduce digital satellite broadcasting programs stored on the hard disk of the hard disk drive 29 of the STB 2.

#### Television Receiver (Display Device)

Fig. 5 is a block diagram illustrating the television receiver 3 used in the game machine system according to the first embodiment. In this television receiver 3 of the present embodiment, ground-wave television broadcasting signal received by an antenna 31 is supplied to a UHF/VHF tuner (hereinafter referred to simply as a tuner) 32.

The tuner 32 selects and demodulates a broadcasting signal specified by a selection control signal generated by a controller 200 in accordance with a selection command input via a keypad 204. The resultant broadcasting signal is supplied to an audio/visual signal processing circuit (hereinafter referred to as an A/V signal processing circuit) 33. The A/V signal processing circuit 33 processes the received video signal and audio signal so as to generate

a video signal to be supplied to an RGB demodulator 34 and also generate an audio signal to be supplied to an audio amplifier 36.

The RGB demodulator 34 generates three primary color signals, that is, R (red), G (green), and B (blue) signals, from the received video signal and supplies the resultant R, G, and B signals to a cathode ray tube 35 serving as a display device of the television receiver 3 according to the present embodiment. Thus, the image of the received broadcasting program is displayed on the screen of the cathode ray tube 35.

The audio amplifier 36 generates an analog audio signal to be supplied to a loudspeaker 37 by amplifying the received audio signal and supplies the resultant analog audio signal to the loudspeaker 37. The loudspeaker 37 generates a voice/sound of the received broadcasting program.

The television receiver 3 of this first embodiment further includes a digital input/output terminal 3d, an IEEE-1394 interface circuit 38, a controller 39 for the IEEE-1394 interface circuit 38, and an MPEG decoder 40, thereby allowing image information representing a game image or an audio signal of a game to be received via the digital bus 4 and MPEG-decoded (decompressed). The resultant signal is supplied to the A/V signal processing circuit 33.

That is, it is possible to receive image information

from the game machine 1 via the digital bus 4 and display a game image on the screen of the display device 35 of the television receiver 3 in accordance with the received image information. Furthermore, it is possible to generate game sounds/voices for the loudspeaker by supplying the audio signal received from the game machine 1 to the loudspeaker of the television receiver 3.

The MPEG decoder 40 of the television receiver 3 according to the present embodiment also has the capability of synthesizing image data. More specifically, the MPEG decoder 30 can generate an image by combining the image data such as the background image which is directly received in the MPEG-compressed form from the STB 2 via the digital bus 4 and the image data such as a game character which is generated by the game machine 1 and transmitted from the game machine 1 via the digital bus 4. The resultant synthesized image data is supplied to the A/V signal processing circuit 33 to display the game image on the display device 35.

As described above, the television receiver 3 of the present embodiment is connected to the game machine 1 and the STB 2 via the digital bus 4 and has the capability of synthesizing image data whereby the television receiver 3 has not only the capability of simply displaying the image of the supplied image data but also the capability of

displaying the synthesized image. In the present embodiment, unlike the conventional technique in which game images are generated only by the game machine, the process of generating game images is distributed among a plurality of devices and thus it becomes possible to present, to users, quick-motion games without reducing the speed of motion.

Furthermore, audio signals used in games may be supplied to the television receiver 3 without being processed by the game machine 1. This allows a reduction in the load upon the game machine 1 and thus it becomes possible for users to enjoy games under better operating conditions.

#### Operation of the Game Machine System

The operation of the game machine system including the game machine 1, the STB 2, and the television receiver 3 according to the first embodiment is described below with reference to the flow chart shown in Fig. 6.

Fig. 6 illustrates the operation flow associated with the game machine system for the case where game software information is provided from a game provider via digital satellite broadcasting and a game is executed using the provided game software information.

After turning on the electronic power of the game machine 1, the STB 2, and the television receiver 3

connected to the digital bus 2, if a command to transmit a game software information request to a game provider is input via the control unit 11 of the game machine 1, the game machine 1 establishes a telephone line connection with the server of the game provider and performs an uplink process to transmit the game software information request (step S101).

More specifically, in step S101, an uplink program is read from the ROM 17 and executed in response to the command issued by the user via the control unit 11. In accordance with this program, the CPU 15 of the game machine 1 controls the modem 19 so as to make a connection via a telephone line with the server of the game provider. After establishing the communication line, a game selection menu transmission request is transmitted together with the password and/or user identification information of the user to the provider via the established communication line.

If the server of the game provider receives the game selection menu transmission request via the communication line, the server performs user authentication and examines the accounting information on the basis of the password or the user identification information received together with the games election menu transmission request. The result is returned to game machine 1. If the game machine 1 receives the result via the modem 19, the game machine 1 temporarily

stores it in the RAM 18 (step S102).

The status or the accounting information (the total fee to be paid for received game software information) indicated by the result of the authentication is output to the television receiver 3 via the IEEE-1394 interface circuit 14 and displayed on the display device 35 of the television 3 thereby informing the user of the status and the total fee to be paid.

If the authentication succeeds, that is, if it is determined that the user who has issued the request for the game selection menu is a user authorized to receive game software information, encryption key information required to descramble the game software information provided via the digital satellite broadcasting is also transmitted from the game provider to the game machine 1 via the communication line, as will be described later.

The CPU 15 of the game machine 1 checks the information, which has been temporarily stored in the RAM after being received from the game provider, to determine whether the authentication has been successfully passed (step S103). If it is determined in step S103 that the authentication has been successfully passed, a game selection menu transmitted from the server of the game provider via the established communication line is downloaded into the RAM 18 of the game machine 1 (step S104).

The game machine 1 supplies the downloaded data of the game selection menu to the television receiver 3 via the digital bus. The game selection menu is displayed in a scrollable fashion on the display device 35 of the television receiver 3 so that the user can select a desired game from the game selection menu (step S105).

More specifically, step S105 is performed as follows:

(1) The CPU 15 of the game machine 1 reads the game selection menu from the RAM 18 and transmits it to the television receiver 3 over the digital bus 4 via the IEEE-1394 interface circuit 14 thereby supplying it to television receiver 3. The television receiver 3 displays the received game selection menu on the display device thereof.

(2) If a scroll command is issued via the control unit 11 of the game machine 1, the scroll command is transmitted to the television receiver 3. In response to the scroll command, the television receiver 3 scrolls the game selection menu so that the user can select a desired game.

(3) If the user presses an Enter key of the control unit 11 of the game machine 1, a request for the game software information of the selected game is transmitted to the server of the game provider via the modem 19 and the telephone communication line maintained in the connected state. Thus, step S105 is completed.

In response to the game software information request



received via the communication line, the server of the game provider broadcasts the requested game software information using a broadcasting apparatus. The STB 2 starts receiving and descrambling the broadcasted game software information and storing (downloading) on the hard disk driven by the hard disk drive 29 disposed in the STB 2 (step S106).

In this step, the STB 2 is set in the record mode in which the STB 2 receives the particular predetermined digital satellite broadcasting signal carrying the game software information, and the received digital satellite broadcasting signal is stored on the hard disk of the STB 2.

The descrambling process, in step S106, for decrypting the encrypted game software information supplied via the digital satellite broadcasting is performed using the encryption key information supplied from the game provider via the communication line, as described earlier. This allows only STBs 2 of users whose have passed the authentication based on the password or user identification information to correctly descramble and download game software information into a usable form and store it on hard disks.

After that, it is determined whether a download cancel command indicating that downloading of the requested game software information should be terminated is issued by the user of the game machine system (step S107). If it is

determined that the download cancel command is not issued, the requested game software information is entirely downloaded onto the hard disk (step S108).

In the case where the game software information includes an amount of data corresponding to the full capacity of one 650-MB CD-ROM, it takes about 102 sec to download it via digital satellite broadcasting when a BS (broadcasting satellite) is employed, and 153 sec when a CS (communication satellite) is employed.

If the downloading of the desired game software information is completed in step S108, the STB 2 informs the game machine 1 that the downloading has been completed. In response, the game machine 1 informs the server of the game provider, via the modem 19 and the communication line maintained in the connected state, that the downloading of the desired game software information has been completed. At this stage, accounting is performed (step S109).

After that, the CPU 15 of the game machine 1 controls the modem 19 so as to disconnect (release) the communication line (step S110), and executes a game in accordance with the game software information downloaded on the hard disk of the STB 2 (step S111). More specifically, a game control program included in the game software information downloaded in the STB 2 is supplied to the game machine 1 via the digital bus 4 and executed by the game machine 1.

In this first embodiment, image data representing the background image of the game is supplied from the STB 2 to the television receiver 3. On the other hand, image data associated with characters in the game is supplied to the game machine 1 and is used by the graphic synthesizer 16 to generate the images of characters. The resultant character images are supplied to the television receiver 3 via the digital bus 4.

The television receiver 3 forms a game image by combining the image data (moving image data) representing the background image received from the STB 2 and the character image data received from the game machine 1. The resultant image data is supplied to the display device 35 of the television receiver 3 and thus the game image is displayed thereon.

Via the above-described process, the game image is displayed on the display device 35 of the television receiver 3. The game machine 1 accepts a command input by the user via the control unit 11 (step S112). In accordance with the game control program and the command given by the user, further image data is supplied to the game machine 1 and the television receiver 3. The game machine 1 generates a character image by means of real-time image generation calculation. Using the resultant character image, the television receiver 3 performs image synthesis and changes

the scene of the game (step S113).

Furthermore, it is determined whether a game end command is input by the user (step S114). If the game end command is not input, the process returns to step S112, and steps S112 and S113 are performed repeatedly until the game end command is input. During the iteration of steps S112 and S113, the scene of the game is changed many times in accordance with the game control program and commands given by the user. Thus, the user can enjoy the game.

If it is determined in step S114 that the game end command is issued by the user, an ending process is performed such that the game software information stored on the hard disk of the STB 2 is software-locked or deleted from the hard disk (step S115), and the game is ended.

In the case where it is determined in the decision step S103 that the user is an unauthorized user or in the case where it is determined in the decision step S107 that the download cancel command is issued by the user, the CPU 15 of the game machine 1 controls the modem 19 so as to disconnect (release) the telephone line (step S106) and terminates the process shown in Fig. 6.

In this first embodiment, as described earlier, the audio data used in the game is also supplied from the STB 2 to the television receiver 3. In the television receiver 3, the audio data is decompressed and a voice/sound is

generated by the loudspeaker in accordance with the audio data.

In the first embodiment, as described above, when the downloading of game software information to the STB 2 is completed, the game machine 1 access the hard disk of the STB 2 each time the game machine 1 needs the game software information stored on the hard disk and renders a 3D (three-dimensional) or 2D (two-dimensional) image thereby displaying the game image on the display device of the television receiver 3 and thus allowing the user to enjoy the game.

In this first embodiment, because the image data processing and the audio data processing are partially performed by the television receiver 3, the load upon the game machine 1 is reduced. This makes it possible to execute games including quicker-motion game images.

When data is transmitted/received among the game machine 1, the STB 2, and the television receiver 3, control information or the like is transmitted via the digital bus in response to AV/C commands, while image data and audio data are transmitted in the asynchronous mode defined in the IEEE-1394 standard in terms of the digital interface.

If the hard disk for storing game software information has a capacity of 5 GB or greater, game software information including as much information as that stored on a DVD-ROM

can be stored on the hard disk.

Because it is not necessary for the game machine itself to include a drive for driving a storage medium on which game software information is stored, the structure of the game machine becomes simple and it becomes possible to reduce the cost of the game machine. Thus in this first embodiment, as shown in Fig. 1, unlike the conventional game machine including the drive for driving a storage medium on which game software information is stored, the main unit of the game machine is not required to have such a drive, and the game machine can be made up of only the control unit usually called a game controller.

Furthermore, the STB 2 used to acquire game software information via digital satellite broadcasting, store it on the hard disk, and supply it to the game machine 1 or the television receiver 3 also has the capability of receiving ordinal digital satellite broadcasting programs. That is, the STB 2 is provided not only to obtain game software information via digital satellite broadcasting but to receive digital satellite broadcasting programs. Therefore, the STB 2 does not become useless even when games are not executed.

STBs 2 and hard disk drives 29 may be sold separately so that users can attach a hard disk drive 29 to his/her STB 2 if the hard disk drive 29 is necessary. This prevents the

users who do not want to acquire game software information from having to buy expensive STBs 2. In this case, the hard disk drive 29 should of the type which can be attached by the user to the STB 2.

Another advantage is that because game software information is provided via digital satellite broadcasting having a large transmission capacity, a great reduction in the communication cost needed to acquire game software information is achieved, compared with the communication cost needed when a communication line with small transmission capacity is used.

Furthermore, the user can select a desired game from a large number of games available from the game provider. This is very convenient for the user. Furthermore, the user can purchase desired game software information on line without having to visit a shop to purchase a game software package. This is also very convenient for the user.

In the ending process in step S115 shown in the flow chart of Fig. 6, the game software information is held on the hard disk of the STB 2 after being software-locked or removed from the hard disk of the STB 2. When the game software information is software-locked, it is required to input new key information each time the game software information is used.

In the case where game software information is

software-locked, when the user wants to use the software-locked game software information, the user acquires key information from the game provider via a telephone line and releases the software lock using the acquired key information thereby making the game software information usable. In this case, accounting may be performed each time key information for releasing the software lock is provided.

In the case where game software information is deleted each time the game is ended, when the user wants to use the same game software information, it is necessary to again receive the game software information. The game provider may charge the providing of game software information each time the game provider provides game software information.

Because usage of game software information is charged each time game software information is used, the user can enjoy games in a similar manner as if the user were enjoying games in an amusement arcade.

The game provider may present explanations of games, or may present sample game software information which is allowed to be executed for predetermined particular periods of time so that users can purchase only game software information which pleased the user.

The explanations or the sample game software information may be provided via telephone lines or digital satellite broadcasting. This prevents users from spending



money for useless games.

Hard disks can be brought into an operating state from a standby state in a short time, and a short seek time is required in random access, compared to CD-ROMs and DVDs. Therefore, the use of hard disk to store game software information allows desired data such as image data to be quickly read from the hard disk and transmitted, compared with the case where a CD-ROM or a DVD is used to store game software information. Thus, it is possible to execute games including quick-motion images without causing a reduction in the speed of the games.

#### Second Embodiment

In the above-described game machine system according to the first embodiment, the game machine 1, the STB 2, and the television receiver 3 are connected to each other via the digital bus, that is via a cable. However, in some cases, the digital bus line extending in a room to connect the devices to each other is obstructive.

In particular, the location of the game machine system is limited by the connection of the modem disposed in the game machine 1 to a telephone modular jack disposed at a particular fixed position on a wall of a room. In the game machine system according to this second embodiment, the above problem is avoided by connecting the respective

devices via a wireless communication channel. This makes it unnecessary to use a digital bus line in the form of a cable which can be obstructive and can limit the locations where the devices of the game machine system are placed.

Fig. 7 illustrates the game machine system according to the second embodiment. In this second embodiment, as will be described later in further detail, the game machine system includes a game machine 5 and an STB 6 both having a wireless communication capability. In this second embodiment, as shown in Fig. 7, an interior wireless LAN unit 9 including a modem disposed therein is connected to a modular jack L1 connected to a telephone line L.

The interior wireless LAN unit 9 and the game machine 5 of the second embodiment are coupled to each other by means of wireless communication, and the game machine 5 and the STB 6 are coupled to each other by means of wireless communication. Thus, the game machine system is realized in the form of a wireless LAN system.

In this second embodiment, a television receiver 7 of the analog type is connected to the game machine 5 via an analog transmission cable. When a user plays a game, the user operates the game machine 5 while viewing the game screen displayed on the television receiver 7. Therefore, the game machine 5 and the television receiver 7 are always at close locations when used. Therefore, the game machine 5

and the television receiver 7 are connected to each other via the analog transmission cable.

A camera/microphone unit 8 is similar to the camera/microphone unit 8 employed in the first embodiment described above. The camera/microphone unit 8 is generally used at a location close to the game machine 5, and thus it is connected to the game machine 1 via a cable. When the camera/microphone unit 8 is not used, it may be disconnected from the game machine 5.

The game machine system of this second embodiment operates in a similar manner to that of the first embodiment described above except that the communication between the game machine 5 and the interior wireless LAN unit 9 including the built-in modem and the communication between the game machine 5 and the STB 6 are performed by means of wireless communication.

Also in this game machine system in the form of the wireless LAN system, data can be transmitted/received at a sufficiently high speed. The data transmission rate of this game machine system (wireless LAN system) of this second embodiment is described below.

DVD-ROM and CD-ROM are widely used as storage media for storing game software information. When a DVD-ROM is used, the maximum data transmission rate is 1 to 5 times the standard rate, more specifically, 1.35 MB/s to 6.75 MB/s.

In the case where a CD-ROM is used, the maximum data transmission rate is 2 to 32 times the standard rate, and more specifically, 0.3 MB/s to 4.8 MB/s.

In view of the above, one choice as to the range of transmission rate is to employ a range of 2.4 Mbps (0.3 MB/s) to 54 Mbps (6.75 MB/s). However, in practical games using CD-ROMs, the range of 4 to 8 times the standard rate is recommended as the data transmission rate, and thus it is sufficient for the wireless LAN system if the range is set to be 4.8 bps (0.6 MB/s) to 9.6 Mbps (1.2 MB/s).

For use in Japan, although only one channel of 2.4 GHz band is permitted for the wireless LAN, a rather high transmission rate of 2 Mbps to 10 Mbps is allowed, and thus it is possible to transmit moving image data and audio data included in game software information.

In Japan, there is a plan for assigning three channels to the wireless LAN. Thus, it is expected that the transmission rate will be increased to 3 times the current transmission rate, that is 6 Mbps to 30 Mbps. This will allow a larger amount of data to be transmitted. Any way, the game machine system similar to that according the first embodiment can also be achieved by connecting the game machine and the STB via the wireless LAN.

In this second embodiment, communication via the wireless LAN system is performed in accordance to the DSSS

(Direct Sequence Spread Spectrum) method, and the transmission protocol according to the IEEE-802.1 standard is used. In this method, indoor transmission is possible within a range of 30 m to 300 m. The communication method and the protocol are not limited to those employed herein, but other communication methods and protocols may also be employed.

Now, the game machine 5, the STB 6, the television receiver 7, and the interior LAN unit 9 of the game machine system capable of performing high-speed transmission via the wireless LAN according to the second embodiment are described below.

#### Game Machine

Fig. 8 is a block diagram illustrating the game machine 5 of the second embodiment. As shown in Fig. 8, the game machine 5 of the second embodiment is similar to the game machine 1 of the first embodiment described above with reference to Fig. 3 except that the game machine 5 further includes an audio processor 51, an MPEG decoder 52, a wireless communication processing unit 53, and a transmitting/receiving antenna 54. Therefore, in this game machine according to the second embodiment, similar parts to those of the game machine 1 of the first embodiment are denoted by similar reference numerals and they are not

described in further detail herein.

In the game machine 5 of this second embodiment, the audio processor 51, as will be described in further detail later, decompresses audio data used in a game, supplied from the STB 6 via the wireless communication, and converts it from digital to analog form thereby generating an analog audio signal. The resultant analog audio signal is supplied to the analog television receiver 7 connected via the analog transmission cable.

The MPEG decoder 52 decompresses image data such as a background image and a character image used in the game, supplied from the STB 6 via the wireless communication. The MPEG decoder 52 also produces an image synthesized from a background image and a game character image and converts the produced image from digital form into analog form thereby producing an analog image signal representing a game image. The resultant analog image signal is supplied to the analog television 7 via the analog transmission cable.

The game machine 5 of the second embodiment, as described earlier, also includes the interior LAN unit 9 connected to the modular jack L1 of the telephone line and further includes the wireless communication processing unit 53 for communicating with the STB 6. Control information and other data are transmitted and received to and from various devices via the wireless communication processing

unit 53.

Fig. 9 is a block diagram illustrating the wireless communication processing unit 53 of the game machine 5. As shown in Fig. 9, the wireless communication processing unit 53 of the second embodiment includes an antenna duplexer 531, a transmitting/receiving circuit 532, a modulator/demodulator 533, a baseband processing circuit 534, and a frequency synthesizer 535.

The antenna 54 connected to the antenna duplexer 531 is used for both transmission and reception. That is, the antenna 54 receives an incoming signal and transmits a signal output from the wireless communication processing unit 53. The antenna duplexer 531 serves to prevent interference between the signal output from the wireless communication processing unit 53 and the signal received by the antenna.

The transmitting/receiving circuit 532 disposed at the stage following the antenna duplexer 531 includes a receiving circuit 5321 and a transmitting circuit 5322. The receiving circuit 5321 amplifies the received signal to a predetermined level and selectively passes a signal at a particular frequency specified by the frequency synthesizer which will be described later. The output signal with the selected frequency is supplied to the modulator/demodulator 533.

The transmitting circuit 5322 adjusts the frequency of the modulated signal to be transmitted, supplied from the modulator/demodulator 533, in accordance with a control signal output from the frequency synthesizer 535 which will be described later. The transmitting circuit 5322 then amplifies the signal to be transmitted and transmits it via the antenna duplexer 531 and further via the antenna 54.

The modulator/demodulator 533 demodulates the received signal supplied from the receiving circuit 5321 of the transmitting/receiving circuit 532 and supplies the resultant demodulated signal to the baseband processing circuit 534. The modulator/demodulator 533 also modulates the signal to be transmitted, supplied from the baseband processing circuit 534 and supplies the resultant modulated signal to the transmitting circuit 5322 of the transmitting/receiving circuit 532.

The baseband processing circuit 534 extracts an original baseband signal from the demodulated signal output from the modulator/demodulator 533. The extracted baseband signal is supplied to the control unit including the CPU 15 in the game machine 5. On the other hand, when a baseband signal to be transmitted is supplied to the baseband processing circuit 534 via the CPU bus 20, the baseband processing circuit 534 removes unnecessary frequency components and supplies the resultant signal to the



modulator/demodulator 533. The modulator/demodulator 533 modules the signal supplied from the baseband processing circuit 534, and the resultant signal is transmitted.

The frequency synthesizer 535, as described earlier, specifies the frequency of the signal which should be selectively received and also specifies the frequency of the signal to be transmitted. In this second embodiment, the operations of the respective parts such as the antenna duplexer 531 and the frequency synthesizer 535 are controlled by the CPU 15 of the game machine 5.

In the game machine 5 of the second embodiment, as described above, the use of the wireless communication processing unit 53 allows various kinds of data such as control data, image data, and audio data to be transmitted and received to and from the interior wireless LAN unit 9 including the modem and to and from the STB 6 by means of wireless communication.

Thus, as with game machine system according to the first embodiment, the game machine 5 can make a connection with the server of a game provider via a telephone communication line by controlling the interior wireless LAN unit 9 and can transmit a game selection menu request. After authentication, the game selection menu is supplied to the game machine 5. The game machine 5 can then transmit a request for game software information selected from the game

selection menu.

Also in this second embodiment, as will be described later, the STB 6 includes a wireless communication processing unit similar to that of the game machine 5 so that the STB 6 can transmit and receive various kinds of data such as control data, image data, and audio data to and from the game machine 5 by means of wireless communication.

#### STB 6

Fig. 10 is a block diagram illustrating the STB 6 according to the second embodiment. As shown in Fig. 10, the STB 6 according to the second embodiment is similar to the STB 2 according to the first embodiment described earlier with reference to Fig. 4 except that the STB 6 further includes a wireless communication processing unit 61 and a transmitting/receiving antenna 62. Therefore, in this STB 6 according to the second embodiment, similar parts to those of the STB 2 according to the first embodiment are denoted by similar reference numerals, and they are not described further herein.

In the STB 6 of this second embodiment, the wireless communication processing unit 61 is configured in a similar manner to the wireless communication processing unit 53 of the game machine 5 described above with reference to Fig. 9. That is, the wireless communication processing unit 61 of

the STB 6 includes an antenna duplexer 531, a transmitting/receiving circuit 532, and modulator/demodulator 533, a baseband processing circuit 534, and a frequency synthesizer 535.

Furthermore, as in the STB 2 according to the first embodiment, the STB 6 according to the second embodiment is capable of receiving game software information which is provided via digital satellite broadcasting in response to a request, issued from the game machine 5, for transmission of game software information and is capable of storing the received game software information on a hard disk driven by the hard disk drive 29.

In this second embodiment, the game machine 5 transmits a message to the STB 6 via wireless communication to request transmission of necessary information, such as a game control program, image data, and audio data, included in game software information stored on the hard disk of the STB 6. In response to the request, the STB 6 extracts the requested data from the hard disk and transmits the extracted data to the game machine 5 via wireless communication.

In the STB 6 of the second embodiment, as described above, the use of the wireless communication processing unit 61 allows the STB 6 to be connected to the game machine 5 via wireless communication thereby allowing various kinds of

data such as control data, image data, and audio data to be transmitted and received to and from the game machine 5. More specifically, this makes it possible for the game machine 5 to access, via wireless communication, the game software information stored on the hard disk of the STB 6.

#### Analog Television Receiver

Fig. 11 is a block diagram illustrating the analog television receiver 7 used in the game machine system according to the second embodiment. In this analog television receiver 7 according to the second embodiment, similar parts to those of the television receiver 3 according to the first embodiment described above are denoted by similar reference numerals and they are not described further herein.

In this second embodiment, as described above, the television receiver is connected to the game machine 5 via the analog communication cable. The television receiver used in the first embodiment includes the IEEE-1394 interface circuit and the MPEG decoder and operates as a digital television receiver. In contrast, the analog television receiver used in this second embodiment is of the conventional type and does not have the capability of processing digital signals.

The analog television receiver 7 used in the second

embodiment has an analog image signal input terminal 71Vd for inputting an analog image signal supplied from the game machine 5 and also has an analog audio signal input terminal 71Au for inputting an analog audio signal supplied from the game machine 5.

The analog image signal and the analog audio signal received via the analog image signal input terminal 71Vd and the analog audio signal input terminal 71Au are supplied to an A/V signal processing circuit 33. After processed by the A/V signal processing circuit 33, the analog image signal is supplied to an RGB demodulator 34, which generates three primary color signals and supplies them to a display device 35. On the other hand, the analog audio signal processed by the A/V signal processing circuit 33 is supplied to a loudspeaker 39 via an audio amplifier 38.

As described above, the analog television receiver 7 of the second embodiment displays a game image and generates a game sound/voice in accordance with the analog image signal and the analog audio signal supplied from the game machine 5.

#### Interior Wireless LAN Unit

The interior wireless LAN unit 9 of the second embodiment includes the modem and the wireless communication processing unit described earlier with reference to Fig. 9 and is connected to the modular jack L1 of the telephone

drop L extending from the outside into the inside of a house. The interior wireless LAN unit 9 according to this second embodiment communicates with the game machine 5 by means of wireless communication and makes a connection with the server of the game provider via a communication line whereby various requests issued by the game machine 5 are transmitted to the server of the game provider and a game selection menu received from the game provider is transmitted to the game machine 5.

#### Operation of the Game Machine System According to the Second Embodiment

In this second embodiment, the game machine system is made up of the game machine 5, the STB 6, the television receiver 7, and the interior wireless unit 9 and operates in a similar manner to the game machine system described above with reference to the flow chart shown in Fig. 6, except for some differences.

The game machine system according to the second embodiment is different from that of the first embodiment in that the interior wireless LAN unit 9 having the modem and the game machine 5 are connected with each other via a wireless communication channel, and the game machine 5 and the STB 6 are connected with each other also via a wireless communication channel, whereby various kinds of data are

transmitted by means of wireless communication.

Furthermore, in this second embodiment, the game machine 6 and the analog television receiver 7 are connected with each other via an analog cable, and all processes for generating game images such as generation of a character, synthesis of an image from the generated character and a background image, and rendering of an image are performed by the game machine 5. Audio signals used in games are also processed by the game machine 5, and the resultant analog audio signals are supplied to the television receiver 7.

Thus, the television receiver 7 simply displays a game image and generates a game sound/voice in accordance with the analog image signal and the analog audio signal supplied from the game machine 5, without performing image processing such as image synthesis.

In this second embodiment, a cable for connection between the game machine 5 and the modular jack of the telephone line is unnecessary. Furthermore, a digital bus line for connection between the game machine 5 and the STB 6 is unnecessary. Thus, there is no interconnection cable which would be obstructive.

In the convention system, the connection to a telephone line via a cable limits the location where the game machine system is installed. In contrast, in the present embodiment, devices making up the game machine system can be freely

installed at desired locations in a house without encountering the limitation described above.

In this second embodiment, as in the first embodiment described earlier, various advantages such as a reduction in the cost of the game machine, a reduction in communication cost required to receive game software information, and an increase in convenience in use of games are achieved.

Also in this second embodiment, it is possible to provide a network communication game service in which payment is performed on a pay-per-use basis. Furthermore, the game provider may provide explanations of games or may provide sample game software information which is allowed to be executed for predetermined particular periods of time so that users can purchase only game software information which pleased the user.

In the second embodiment described above, the game machine 5 and the television receiver 7 are connected to each other via the analog cable. However, the connection is not limited to that via an analog cable. The game machine 5 and the television receiver 7 may be connected to each other via a digital wireless communication channel. In this case, a wireless communication processing unit and an MPEG decoder similar to those shown in Fig. 9 are disposed in the television receiver 7, thereby making it possible for the television receiver 7 to perform various kinds of processing



such as decompression of compressed digital data, synthesis of an image, and processing of a digital audio signal, as in the first embodiment.

Alternatively, the interior wireless communication unit 9 and the game machine 5 may be connected to each other via a wireless communication channel, while the connections between the game machine 5 and the STB 6 and between the game machine 5 and the television receiver 7 may be realized by a digital bus. This simple connection method allows the components of the game machine system to be relatively freely located without causing a significant limitation in the locations.

#### Accounting

In the first and second embodiments, accounting is performed when the game provider receives, via a communication line, a message informing that game software information which is supplied from a game provide via broadcasting in response to a request issued by the user of the game machine system has been completely stored on the hard disk of the STB of the game machine system.

When a game is ended, the game software information provided by the game provider is removed from the hard disk or software-locked so that when the user wants to play the same game, the user has to receive the same game software

information or key information used to release the software lock.

That is, accounting is performed each time game software information is stored on the hard disk of the STB or each time key information required for releasing the software lock of game software information remaining on the hard disk of the STB is received, thereby allowing the user to enjoy games on a pay-per-play basis in a similar manner as if the user were enjoying games in an amusement arcade.

However, the manner of accounting is not limited to that described above. For example, accounting may also be performed as follows. Each time a command to execute a particular game is input via the control unit 11 of the game machine, the CPU of the game machine updates the game usage history information by storing the identification information of the game and the number of times the game has been used in a memory such as a RAM disposed in the game machine. If the same game is used at a plurality of times, the number of times the games has been used is updated.

Each time game software information is started to be used, or at predetermined intervals, for example, once a day, a week or a month, the game machine system is connected to the server of the game provider via a communication line, and the game usage history information is transmitted to the server of the game provider via the communication line.

In accordance with the received game usage history information, the server of the game provider performs accounting. That is, the server of the game provider calculates the game usage fee in accordance with the number of times the game has been used described in the game usage history information, and bills the user of the game machine.

Alternatively, the game provider may make a connection of a communication line with the game machine system to which game software information has been provided by the game provider and may transmit a request for transmission of the game usage history information to acquire the game usage history information from the game machine system.

As described above, the storing of the game usage history information in the memory of the game machine makes it possible to charge each usage of a game. The memory for storing the game usage history information, the modem for communication via the communication line, and the means for transmission of the game usage history information via the modem and the communication line are not necessarily required to be disposed in the game machine. Instead, they may be disposed in the STB or the television receiver or in one of the other devices connected to the digital communication line in the home network system.

Alternatively, the memory for storing the game usage history information, the modem for communication via the

communication line, and the means for transmission of the game usage history information via the modem and the communication line may be disposed separately in different devices connected to the home network system. Still alternatively, a device having all or part of the above functions is constructed, and it may be connected to the home network system.

The game provide may sell a prepaid card which allows a user to enjoy playing a game a number of times depending upon the price of the prepaid card and specified by data described on the prepaid card. A prepaid card reader/writer capable of rewriting prepaid cards is disposed in one of devices making up the game machine system or in one of devices connected to the home network system.

Each time a game is used, that is, each time a command to execute a particular game is input via the control unit 11 of the game machine, the number of times games can be played, described on the prepaid card, is decremented. That is, the accounting is performed by the game machine depending upon the usage of games.

As described above, instead of performing the accounting when game software information is stored on a hard disk, the accounting may be performed when game software information is used. Although in the above examples, the accounting is performed in accordance with the

number of times game software information has been used, the accounting may also be performed in accordance with the length of time game software information has been used.

In the first and second embodiments described above, when the game provider receives a game software information transmission request issued by a user via a communication line, the game provider transmits the requested game software information by means of broadcasting. However, the manner of providing game software information is not limited to that described in the first and second embodiments.

For example, game software information may be distributed free of charge by means of broadcasting in a similar manner as television programs are broadcasted by means of conventional analog television broadcasting/ A user may check a program table describing when game software information is to be broadcasted and may download desired game software information on the hard disk of the STB of the user. In this case, the user is not needed to transmit a game software information transmission request via a telephone line.

Alternatively, a user may purchase a memory card such a magnetic card on which a password or user identification information is stored, and a card reader for reading information from the memory card may be connected to the game machine 1 or the STB 2 thereby allowing the user to

receive as much game software information as the price which has been paid to obtain the memory card.

Additional information associated with selectable information such as characters, background images, the colors of characters, the colors of background images, and voices which can be selected and used in games may be downloaded from libraries provided by the game provider whenever the user wants to get additional information thereby allowing selectable information such as characters, background images, and voices of the previously provided game software information to be replaced with downloaded additional information.

In the case of conventional package media, information provided is limited by the limitation in the capacity of the media. In contrast, in the present invention, desired additional information associated with selectable information can be acquired whenever it is needed, and thus the user can easily modify games presented by game software information into forms desired by the user and also can upgrade the games.

The selectable information is not limited to characters, background images, the colors of characters, the colors of background images, and voices. The selectable information may further include a program used to increase the game speed, a program used to increase the number of characters

in games, and other information which may be selectively used by the user.

Furthermore, the user can receive an advice for win a game or issue a question about the game via the communication line as required. Furthermore, other services such as supplying of help information may be provided on line or via electronic mail.

Various types of electronic devices such as a videocassette recorder, a DVD recorder/player, or a digital videocassette recorder may be connected to the home network system including the game machine, the STB, and the television receiver. In this case, the game machine may be used as a remote control unit for controlling the respective devices connected to the home network system.

In the embodiments described above, the STB 2 or 5 serves as a home network server. This makes it possible for a plurality of users to enjoy a game using a plurality of game machines at the same time. It becomes also possible to play music (BGM) using an AV device connected to the home network. Furthermore, it is also possible to divide the screen into a plurality of windows and display a game image and a television image or video image in different windows.

When any game is not played, the system may be connected to the Internet to access home pages in a similar manner as with a usual home computer. That is, the system

may be used as a so-called Web television set, Furthermore, visual/voice mail may be may be sent using the camera/microphone unit.

The digital serial bus according to the IEEE-1394 standard is employed to form the home network in the first embodiment described above, while the wireless LAN using the DSSS as the communication method and using the communication protocol according to the IEEE-801.11 is employed in the second embodiment. However, the manner of forming the home network is not limited to those. Various types of digital buses and various types of wireless LANs may also be employed to form the home network.

Furthermore, a mixture of different communication techniques may be used to form the game machine system (home network system). For example, some devices may be connected to the home network via a digital serial bus and other devices may be connected via a wireless LAN. Another example is to use a mixture of an analog communication line and a digital communication line as in the above-described second embodiment in which the game machine and the display device is connected via the analog communication line and the other devices are connected via the digital communication line.

Although in the embodiments described above, game software information is provided by means of digital



satellite broadcasting, the means of providing game software information is not limited to the digital satellite broadcasting. For example, game software information may also be provided via ground-wave digital broadcasting or a dedicated communication line such as that used for cable broadcasting.

It is possible to provide, via broadcasting, a wide variety of game software information ranging from short-time games such as those provided in amusement arcades to long-time games such as role-playing games. The game providing fee may be varied depending upon the amount of data of game software information.

Although in the embodiments described above, the modem is disposed in the game machine 1 or the interior wireless LAN unit 9, the modem may be disposed in the STB or the television receiver.

The communication line for connection between the game machine and the game provider may be of one of various types of communication lines, such as a telephone line or the Internet.

As can be understood from the above description, the present invention has great advantages. That is, the game machine is not necessary to include a drive for reading game software information stored on a storage medium, and thus the cost of the game machine can be reduced.

Furthermore, the present invention makes it possible to for users to easily acquire desired game software information at low cost. The game provider can perform accounting each time the game provider provides game software information.

In the game machine system according to the present invention, the functions of the game machine are distributed among various devices while they are controlled in a centralized fashion thereby providing an environment which allows the user to enjoy various games called television games or computer games at home at low cost.

WHAT IS CLAIMED IS:

1. A game machine system comprising a server device, a display device, and a game executing device, which are connected to each other via a digital communication line,

said server device comprising:

information storage unit for storing game software information including a game control program and display data used to form a game screen in accordance with said game control program;

game software information acquisition means for acquiring said game software information which is provided by means of broadcasting or via a dedicated communication line and storing the acquired game software information in said information storage unit; and

information transmitting means for reading necessary information from said information storage unit in response to a request received via said digital communication line and transmitting said information over said digital communication line,

said game executing device comprising:

game selection command input means for inputting a game selection command to select a specified game;

a game selection request transmission means for transmitting, over said digital communication line, a game

selection request for selection of the game specified by said game selection command input via said game selection command input means;

game control command input means for inputting a game control command;

information request transmission means for transmitting, over said digital communication line, an information request for providing necessary information in accordance with the game control program specified by said game selection command and in accordance with the game control command input via said game control command input means;

information acquisition means for acquiring necessary information from information received via said digital communication line; and

image generation means for generating an image in accordance with game display data included in said information acquired via said information acquisition means and transmitting the image information representing the generated image over said digital communication line,

said display device comprising:

image information acquisition means for acquiring image information transmitted via said digital communication line; and

image displaying means for displaying an image in

according with the image information acquired via said image information acquisition means.

2. A game machine system according to Claim 1, wherein said image information acquisition means of said display device is capable of acquiring data-compressed image information transmitted from said server device over said digital communication line and also image information generated, data-compressed, and transmitted over said digital communication line by said game executing device, and said display device comprises:

decompression means for decompressing the data-compressed image information acquired by said image information acquisition means; and

image synthesizing means for synthesizing an image from the image represented by the image information which has been received from said server device and then decompressed by said decompression means and the image represented by the image information which has been generated by said game executing device and then decompressed by said decompression means.

3. A game machine system according to Claim 1, wherein said server device further comprises:

additional information acquisition means for acquiring

additional information associated with selectable information used in a game and storing said additional information in said information storage unit, said additional information being supplied by means of broadcasting or via a dedicated communication line; and

additional information transmission means for reading the information acquired as said additional information in response to an additional information providing request received via said digital communication line and then transmitting said information over said digital communication line instead of the original information used in the game;

said game executing device further comprising:

additional information selection command input means for inputting an additional information selection command specifying additional information to be used instead of the original selectable information used in the game; and

additional information request transmission means for transmitting a request for additional information specified by said additional information selection command input via said additional information selection command input means, over said digital communication line.

4. A game machine system according to Claim 1, wherein one of devices connected to said digital communication line

includes:

communication line connecting means for connecting a communication line with a game software information provider in response to a command issued by a user; and

information request transmission means for transmitting, in response to a command issued by the user, a request for desired information to said game software information provider via the communication line connected by said communication line connecting means.

5. A game machine system according to Claim 1, wherein one of devices connected to said digital communication line includes:

a usage history information storage unit for storing information about the history of usage of games; and

usage history information updating means for updating said information about the history of usage of games stored in said usage history information storage unit, when said game selection command transmission means of said game executing device has transmitted said game selection command,

thereby making it possible to perform accounting in accordance with the usage history information stored in said usage history information storage unit.

6. A game machine system according to Claim 5, wherein

one of devices connected to said digital communication line includes:

communication line connecting means for connecting a communication line with said game software information provider; and

usage history information transmission means for transmitting said usage history information stored in said usage history information storage unit via said communication line, at a scheduled time or in response to a usage history information transmission request transmitted from said game software information provider via said communication line.

7. A game machine system according to Claim 1, wherein said digital communication line includes a digital serial bus.

8. A game machine system according to Claim 1, wherein said digital communication line includes a wireless communication channel.

9. A server device in a game machine system comprising said server device, a display device, and a game executing device, which are connected to each other via a digital communication line, said server device comprising:



information storage unit for storing game software information including a game control program and display data used to form a game screen in accordance with said game control program;

game software information acquisition means for acquiring said game software information which is provided by means of broadcasting or via a dedicated communication line and storing the acquired game software information in said information storage unit; and

information transmitting means for reading necessary information from said information storage unit in response to a request received via said digital communication line and transmitting said information over said digital communication line.

10. A server device according to Claim 9, further comprising:

additional information acquisition means for acquiring additional information associated with selectable information used in a game and storing said additional information in said information storage unit, said additional information being supplied by means of broadcasting or via a dedicated communication line; and

additional information transmission means for reading the information acquired as said additional information in

response to an additional information providing request received via said digital communication line and then transmitting said information over said digital communication line instead of the original information used in the game.

11. A server device according to Claim 9, further comprising:

communication line connecting means for connecting a communication line with a game software information provider in response to a command issued by a user; and

information request transmission means for transmitting, in response to a command issued by the user, a request for desired information to said game software information provider via the communication line connected by said communication line connecting means.

12. A server device according to Claim 9, further comprising:

a usage history information storage unit for storing information about the history of usage of games; and

usage history information updating means for updating said information about the history of usage of games stored in said usage history information storage unit, when said game selection command transmission means of said game

executing device has transmitted said game selection command over said digital communication line,

thereby making it possible to perform accounting in accordance with the usage history information stored in said usage history information storage unit.

13. A server device according to Claim 12, further comprising:

communication line connecting means for connecting a communication line with a game software information provider; and

usage history information transmission means for transmitting said usage history information stored in said usage history information storage unit via said communication line, at a scheduled time or in response to a usage history information transmission request transmitted from said game software information provider via said communication line.

14. A game executing device in a game machine system comprising a server device, a display device, and said game executing device, which are connected to each other via a digital communication line, said game executing device comprising:

game selection command input means for inputting a game

selection command to select a specified game;

a game selection request transmission means for transmitting, over said digital communication line, a game selection request for selection of the game specified by said game selection command input via said game selection command input means;

game control command input means for inputting a game control command;

information request transmission means for transmitting, over said digital communication line, an information request for providing necessary information in accordance with the game control program specified by said game selection command and in accordance with the game control command input via said game control command input means;

information acquisition means for acquiring necessary information from information received via said digital communication line; and

image generation means for generating an image in accordance with game display data included in said information acquired via said information acquisition means and transmitting the image information representing the generated image over said digital communication line.

15. An game executing device according to Claim 14, further comprising:

additional information selection command input means for inputting an additional information selection command specifying additional information to be used instead of selectable information used in a particular game; and

additional information request transmission means for transmitting a request for additional information specified by said additional information selection command input via said additional information selection command input means, over said digital communication line.

16. An game executing device according to Claim 14, further comprising:

communication line connecting means for connecting a communication line with a game software information provider in response to a command issued by a user; and

information request transmission means for transmitting, in response to a command issued by the user, a request for desired information to said game software information provider via the communication line connected by said communication line connecting means.

17. An game executing device according to Claim 14, further comprising:

a usage history information storage unit for storing information about the history of usage of games; and

usage history information updating means for updating said information about the history of usage of games stored in said usage history information storage unit, when said game selection command transmission means of said game executing device has transmitted said game selection command over said digital communication line,

thereby making it possible to perform accounting in accordance with the usage history information stored in said usage history information storage unit.

18. An game executing device according to Claim 17, further comprising:

communication line connecting means for connecting a communication line with a game software information provider; and

usage history information transmission means for transmitting said usage history information stored in said usage history information storage unit via said communication line, at a scheduled time or in response to a usage history information transmission request transmitted from said game software information provider via said communication line.

19. A display device in a game machine system comprising a server device, said display device, and a game

executing device, which are connected to each other via a digital communication line, said display device comprising:

image information acquisition means for acquiring data-compressed image information transmitted from said server device over said digital communication line and also image information generated, data-compressed, and transmitted over said digital communication line by said game executing device;

decompression means for decompressing the data-compressed image information acquired by said image information acquisition means;

image synthesizing means for synthesizing an image from the image represented by the image information which has been received from said server device and then decompressed by said decompression means and the image represented by the image information which has been generated by said game executing device and then decompressed by said decompression means; and

image displaying means for displaying the image synthesized by said image synthesizing means.

20. A display device according to Claim 19, further comprising:

communication line connecting means for connecting a communication line with a game software information provider

in response to a command issued by a user; and

information request transmission means for transmitting, in response to a command issued by the user, a request for desired information to said game software information provider via the communication line connected by said communication line connecting means.

21. A display device according to Claim 19, further comprising:

a usage history information storage unit for storing information about the history of usage of games;

usage history information updating means for updating said information about the history of usage of games stored in said usage history information storage unit, when said game selection command transmission means of said game executing device has transmitted said game selection command over said digital communication line,

thereby making it possible to perform accounting in accordance with the usage history information stored in said usage history information storage unit.

22. A display device according to Claim 21, further comprising:

communication line connecting means for connecting a communication line with a game software information



provider; and

usage history information transmission means for transmitting said usage history information stored in said usage history information storage unit via said communication line, at a scheduled time or in response to a usage history information transmission request transmitted from said game software information provider via said communication line.

23. A method of using a game using a game machine system comprising a server device, a display device, and a game executing device, which are connected to each other via a digital communication line, said method comprising:

a game software information acquisition step in which said server device acquires game software information supplied via broadcasting or a dedicated communication line and stores the acquired game software information in an information storage unit of said server device, said game software information including a game control program and game displaying data used to form a game screen in accordance with said game control program;

an information transmission step in which said server device reads necessary information from said information storage unit in response to a request received via said digital communication line and transmits said information

over said digital communication line;

a game selection request transmission step in which said game executing device accepts a game selection command issued by a user to select a specified game and transmits, over said digital communication line, a game selection request for selection of the game specified by said game selection command;

an information request transmission step in which said game executing device accepts a game control command issued by the user and transmits, over said digital communication line, a request for providing necessary information in accordance with the game control program specified by said game selection command and in accordance with said game control command accepted via game control command input means;

an information acquisition step in which said game executing device acquires necessary information from information received via said digital communication line;

an image generation step in which said game executing device generates an image in accordance with game display data included in said information acquired in said information acquisition step and transmits the image information representing the generated image over said digital communication line;

an image information acquisition step in which said

image display device acquires image information transmitted via said digital communication line; and

an image displaying step in which said image display device displays an image in according with the image information acquired in said image information acquisition step.

24. A method of using a game according to Claim 23, wherein said image information acquisition step performed by said display device acquires data-compressed image information transmitted from said server device over said digital communication line and also acquires image information generated, data-compressed, and transmitted over said digital communication line by said game executing device;

and wherein method further comprises the steps of:

decompressing the data-compressed image information acquired in said image information acquisition step; and

synthesizing an image from the image represented by the image information which has been received from said server device and then decompressed in said decompression step and the image represented by the image information which has been generated by said game executing device and then decompressed in said decompression step.

25. A method of using a game according to Claim 23, further comprising:

an additional information acquisition step in which said server device acquires additional information associated with selectable information used in a game and storing said additional information in said information storage unit, said additional information being supplied by means of broadcasting or via a dedicated communication line;

an additional information transmission step for reading the information acquired as said additional information in response to an additional information providing request received via said digital communication line and then transmitting said information over said digital communication line instead of the original information used in the game;

an additional information selection command input step in which said game executing device accepts an additional information selection command specifying additional information to be used instead of selectable information used in the game; and

an additional information request transmission step for transmitting a request for additional information specified by said additional information selection command accepted in said additional information selection command input step, over said digital communication line.

26. A method of using a game according to Claim 23, further comprising:

a connection command acceptance step for accepting a connection command indicating that a communication line should be connected with a game software information provider;

a communication line connecting step for connecting a communication line with said game software information provider in response to said connection command accepted in said connection command acceptance step;

a command acceptance step for accepting a command indicating that a request for specified information should be transmitted to said game software information provider; and

an information request transmission step for transmitting, in response to said command accepted in said command acceptance step, a request for specified information to said game software information provider via the communication line connected in said communication line connecting step.

27. A method of using a game according to Claim 26, further comprising:

an authentication step in which said game software

information provider performs authentication when said game software information provider receives an information providing request via said communication line connected in said communication line connecting step;

a requested information providing step for, if the sender of said information providing request is determined as an authorized user in said authentication step, supplying the requested information by means of broadcasting or via a dedicated communication line; and

an accounting step for performing an accounting process when a message indicating that the reception of the information is completed is received via said communication line connected in said communication line connecting step.

28. A method of using a game according to Claim 27, further comprising:

an information usage permission transmission step for, if the sender of said information providing request is determined as an authorized user in said authentication step, transmitting an information usage permission message indicating that the use of the requested information is permitted to said sender of said information providing request; and

an information usage permission message reception step in which said sender of said information providing request

receives said information usage permission message transmitted from said game software information provider via said communication line connected in said communication line connected step.

29. A method of using a game according to Claim 23, further comprising a usage history information updating step for updating information stored in a usage history information storage unit about the history of usage of the requested and selected game, when said game selection request is transmitted in said game selection request transmission step,

thereby making it possible to perform accounting in accordance with the usage history information stored in said usage history information storage unit.

30. A method of using a game according to Claim 29, further comprising:

a communication line connecting step for connecting a communication line with said game software information provider; and

a usage history information transmission step for transmitting said usage history information stored in said usage history information storage unit via said communication line, at a scheduled time or in response to a

usage history information transmission request transmitted from said game software information provider via said communication line.

31. A method of using a game according to Claim 23, wherein said digital communication line includes a digital serial bus.

32. A method of using a game according to Claim 23, wherein said digital communication line includes a wireless communication channel.



ABSTRACT OF THE DISCLOSURE

A game machine system is disclosed which allows a user to enjoy, at home, games according to supplied game software information, at low cost. The game machine system includes a game machine, an STB, and a television receiver, which are connected to each other via a digital bus. The STB receives game software information transmitted via digital satellite broadcasting and stores the received game software information on a hard disk disposed in the STB. The game machine executes a game while accessing the hard disk to read the game software information as required. An image generated by the game machine and image data such as a background image output from the STB are supplied to the television receiver via the digital bus and a game image is displayed on the screen of the television receiver.

FIG. 1

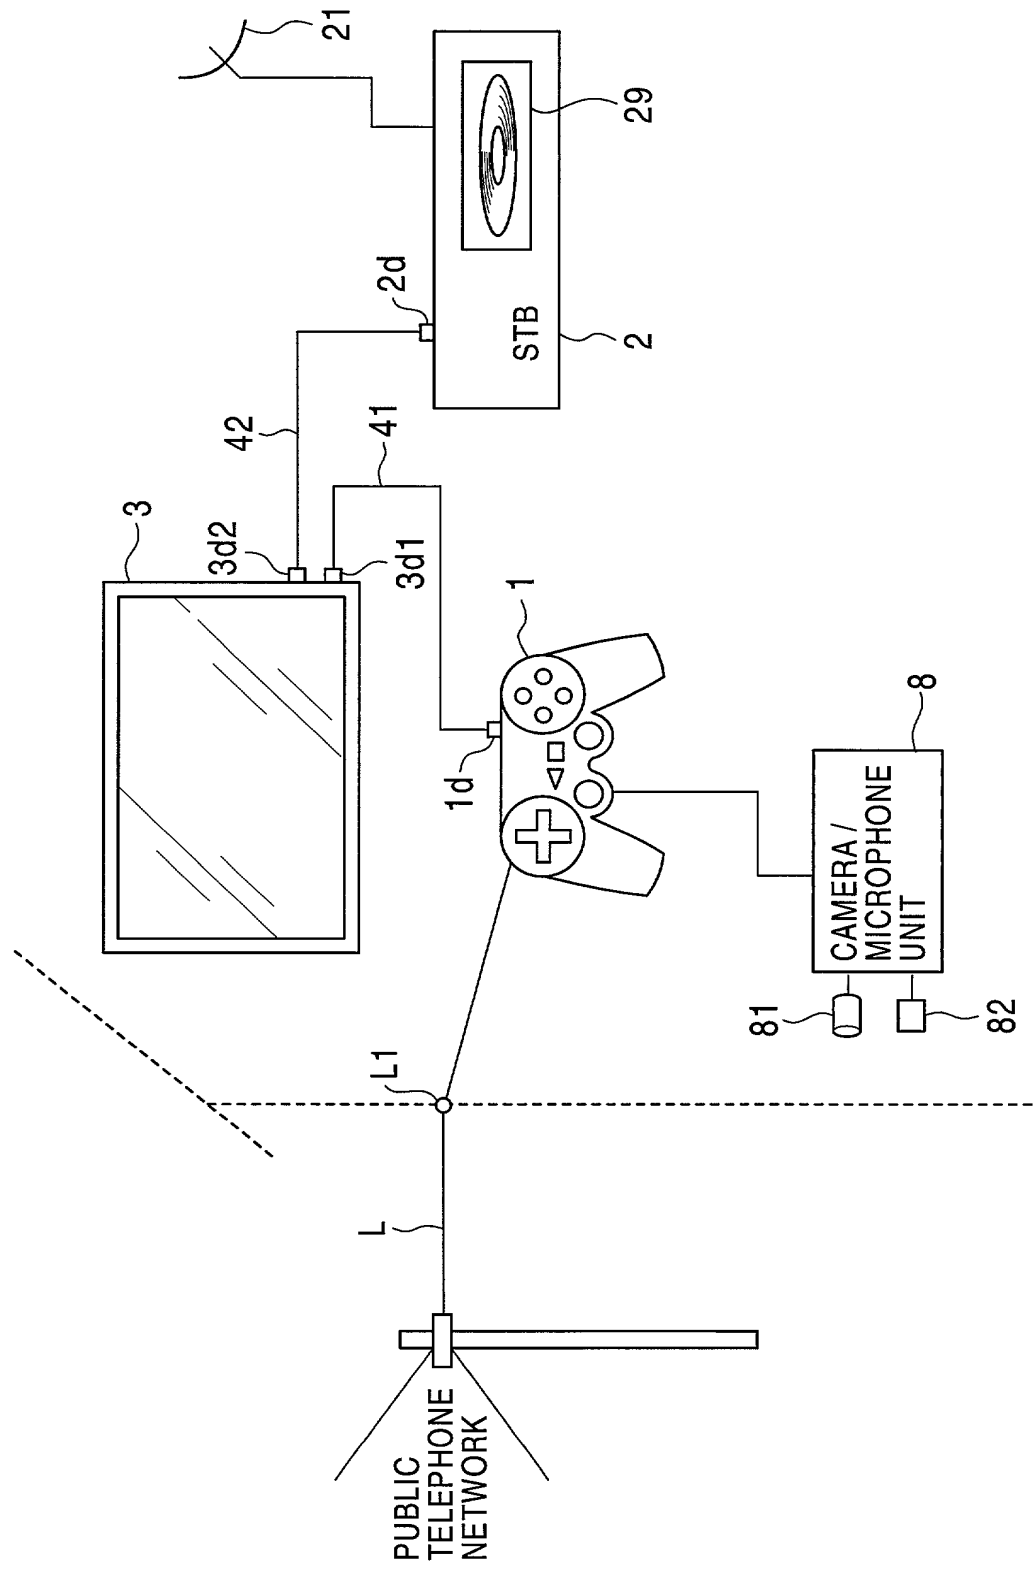


FIG. 2A

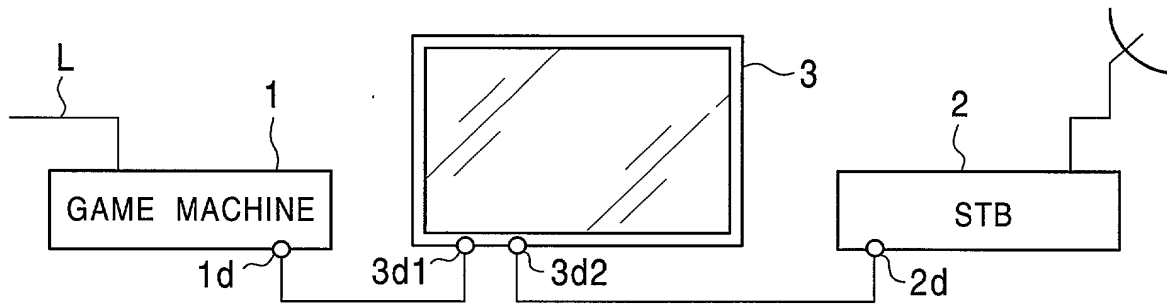


FIG. 2B

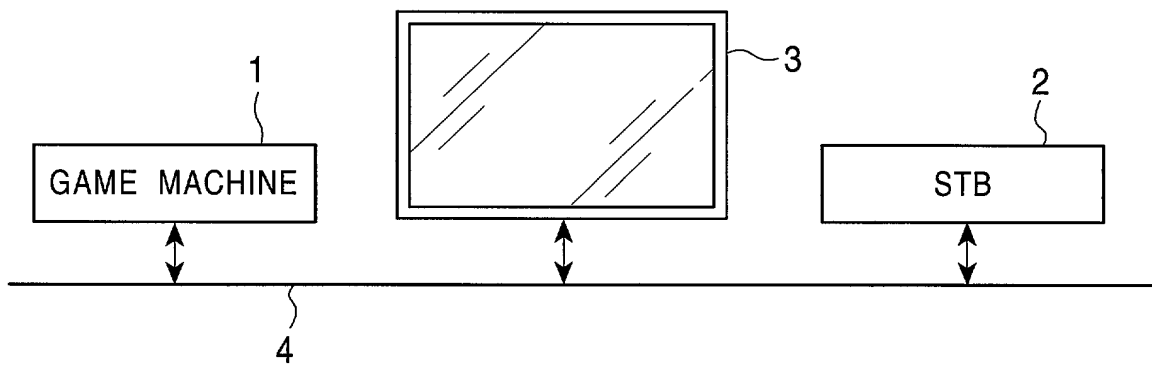


FIG. 3

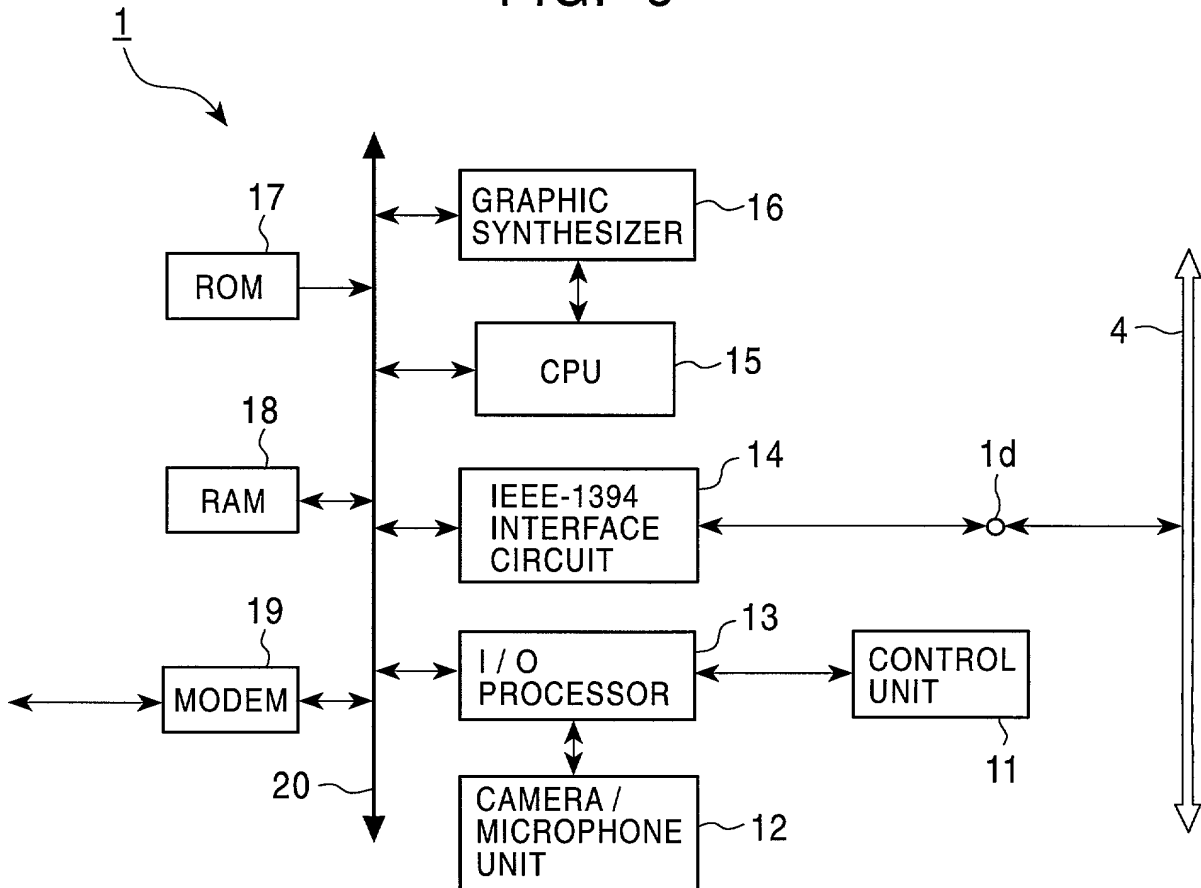


FIG. 4

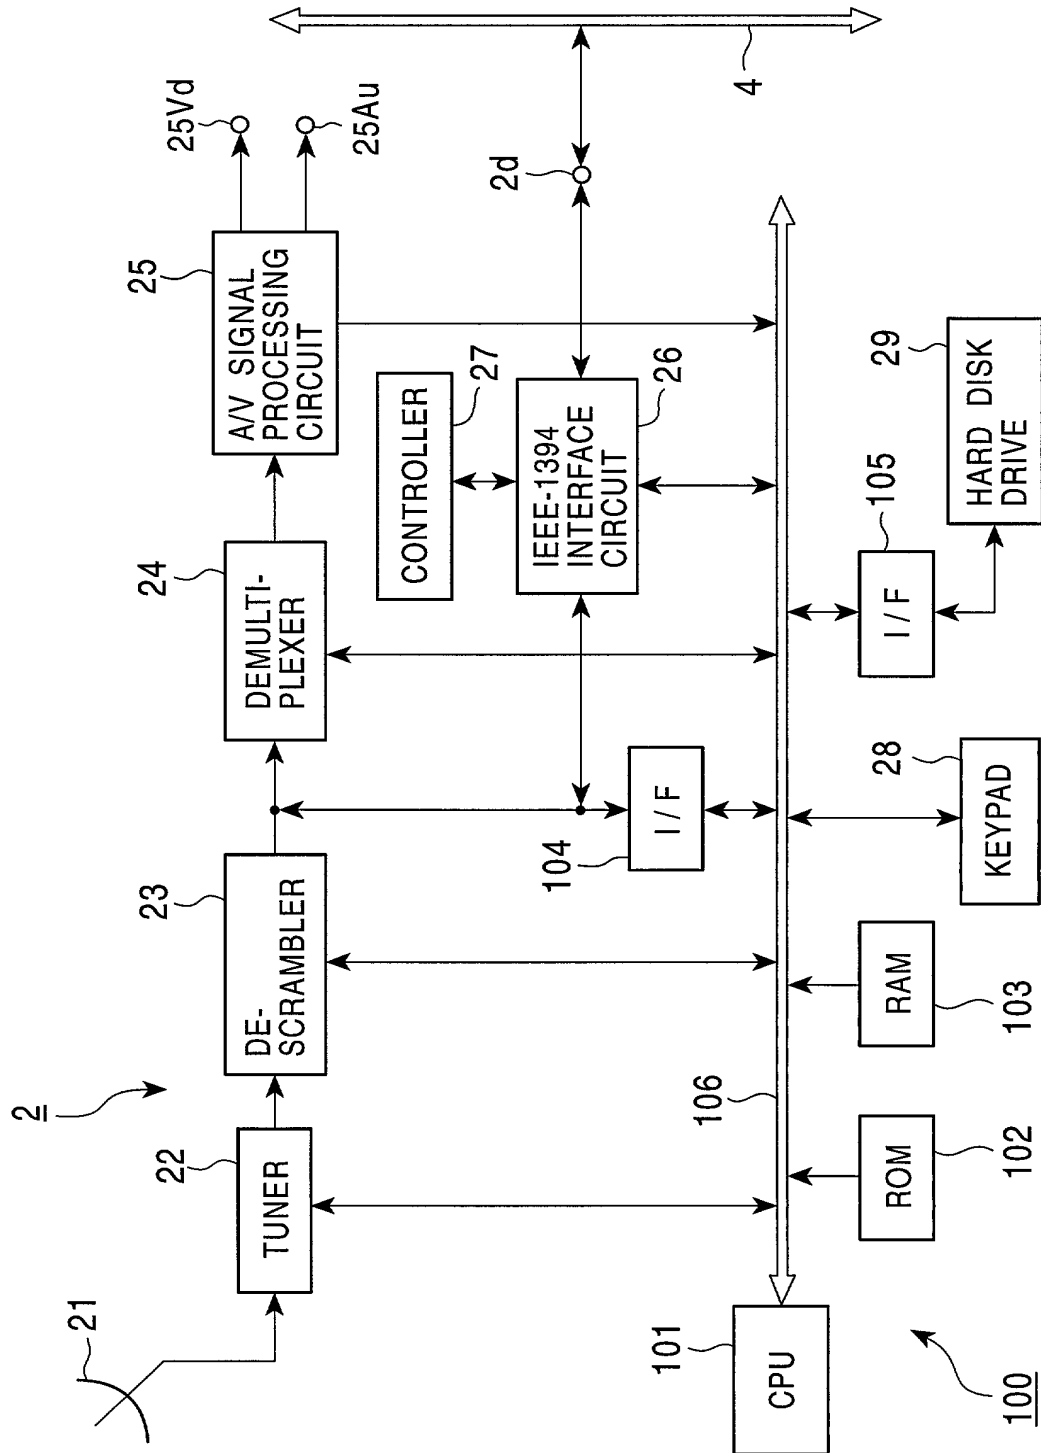


FIG. 5

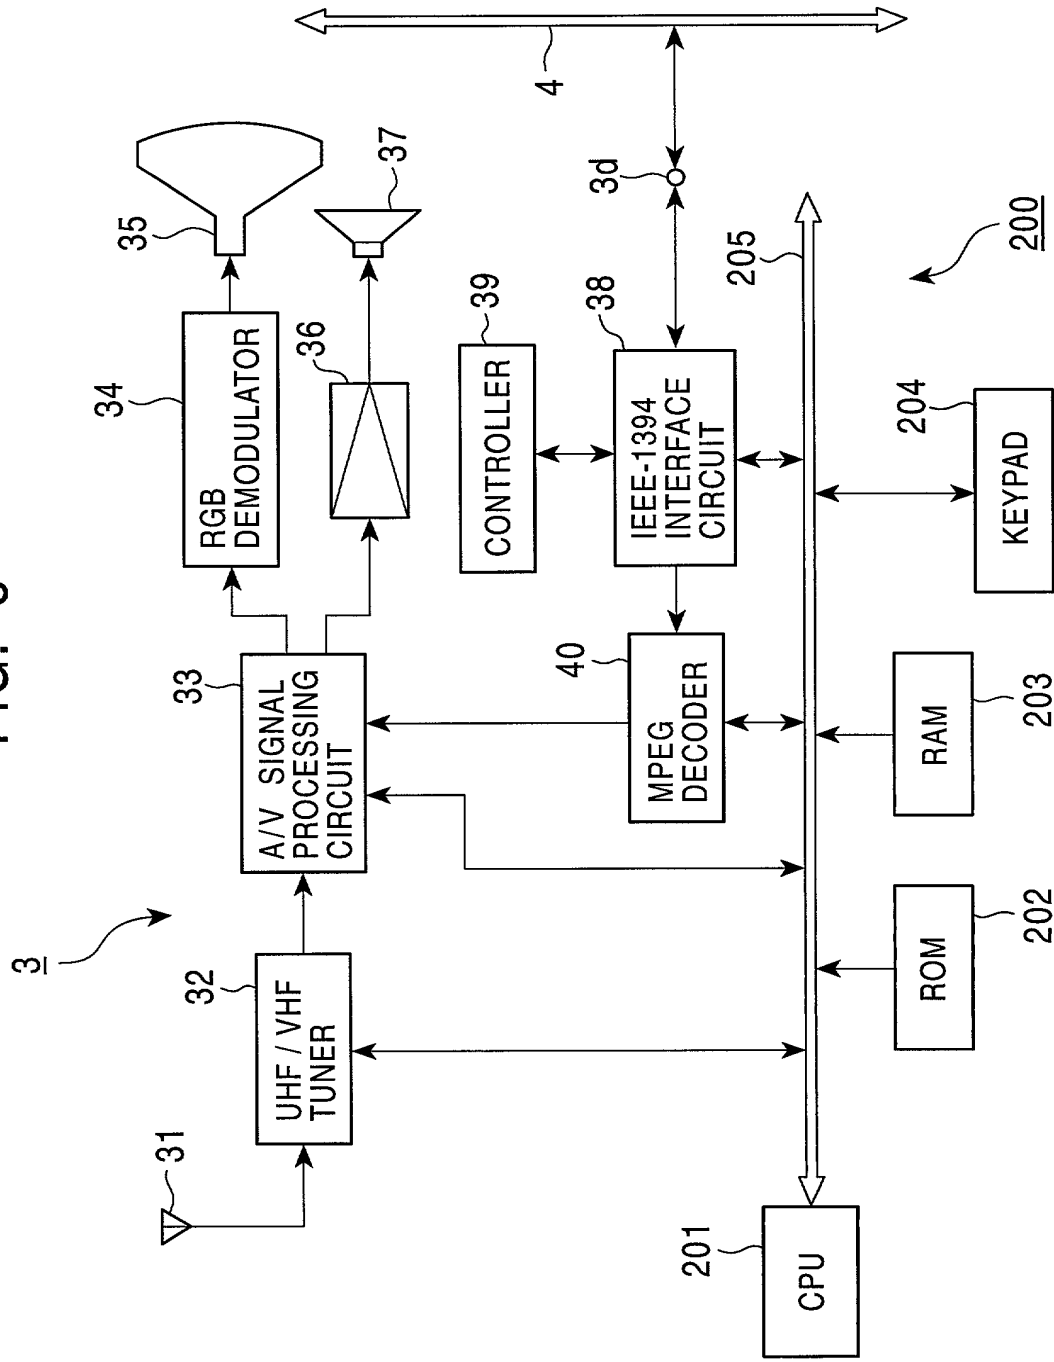


FIG. 6

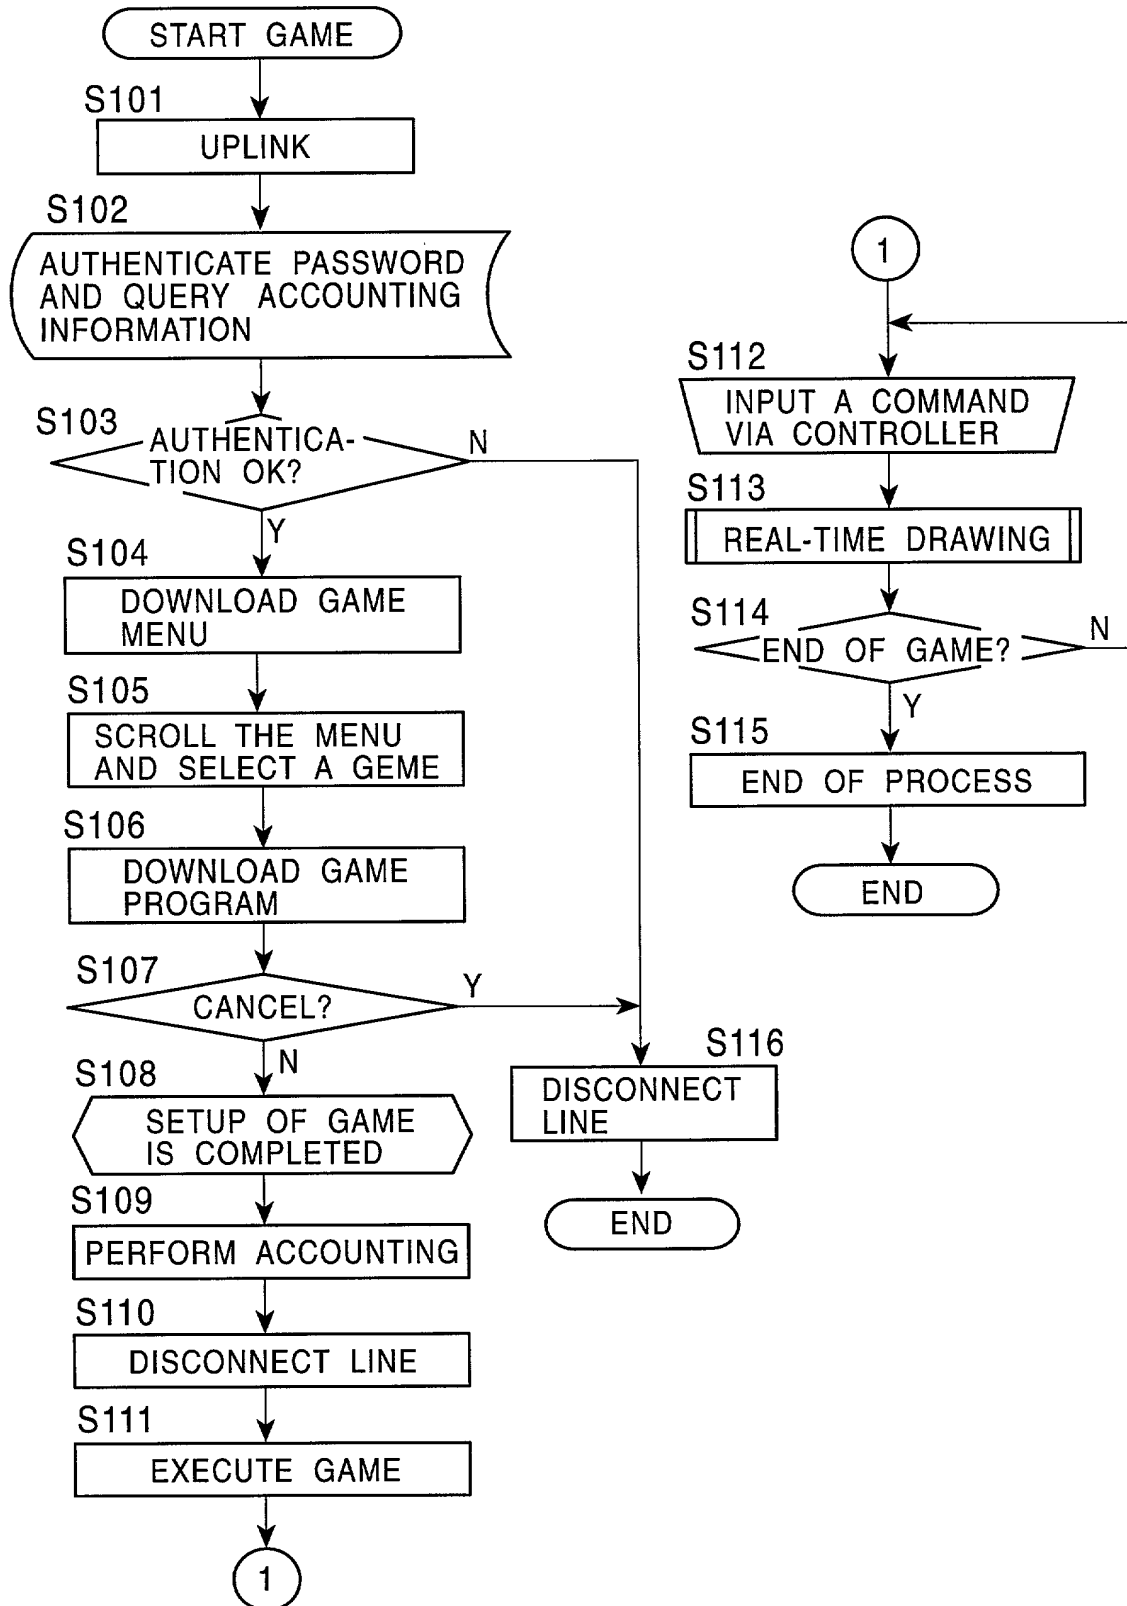


FIG. 7

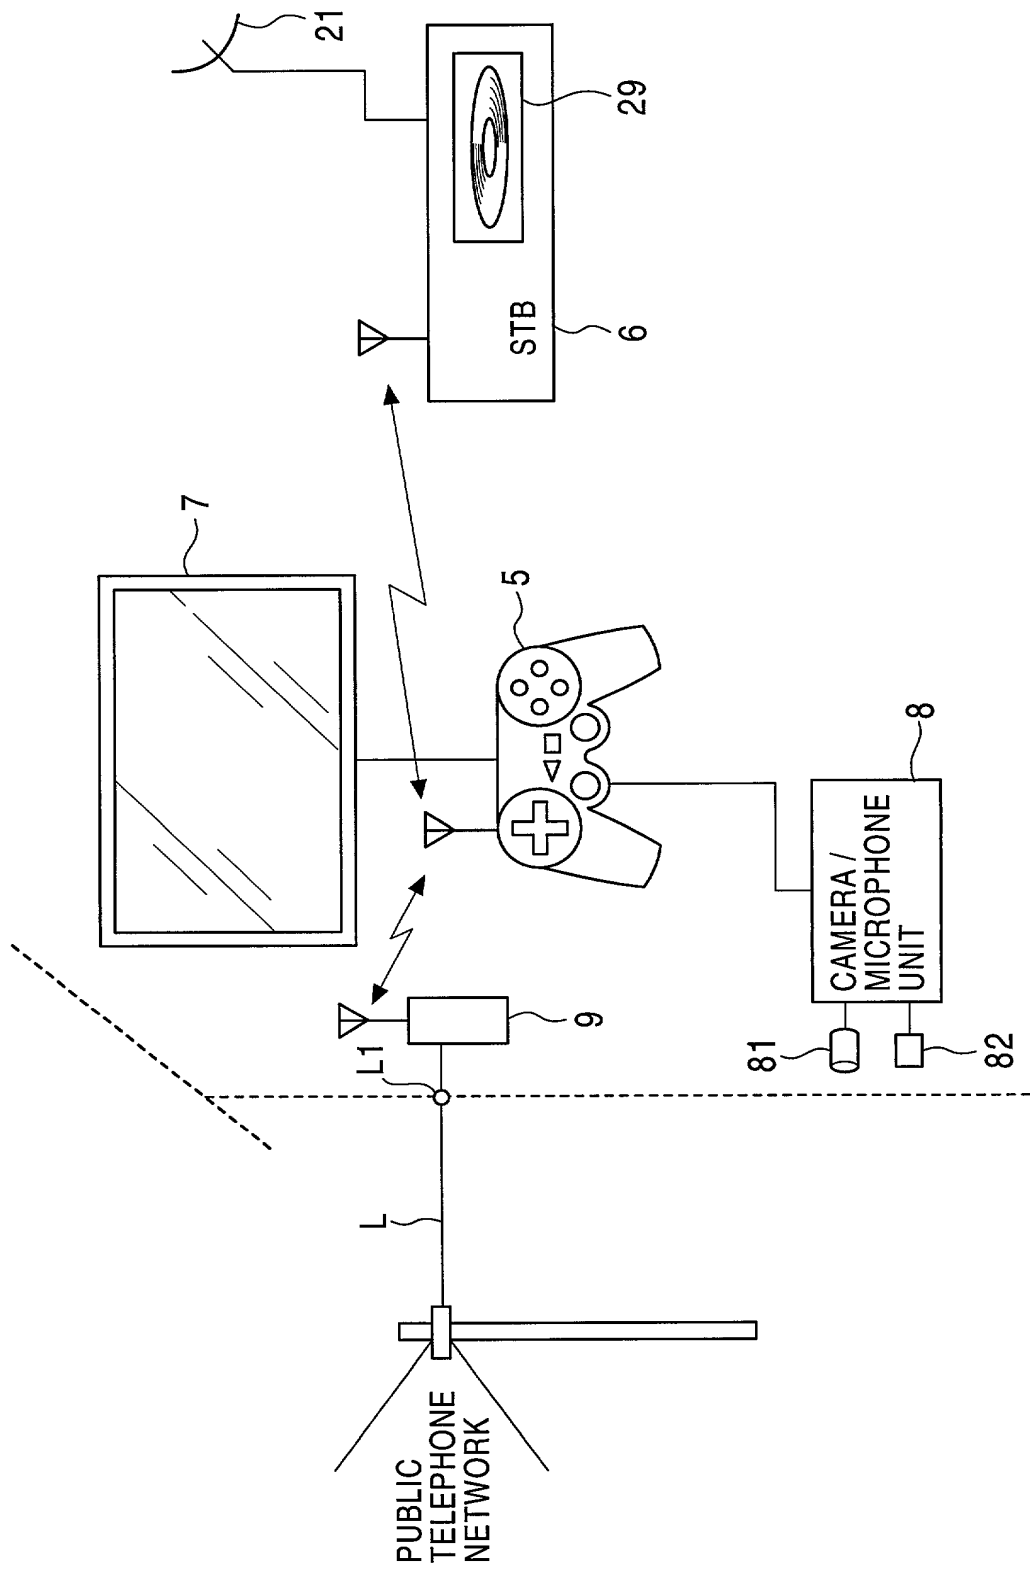




FIG. 8

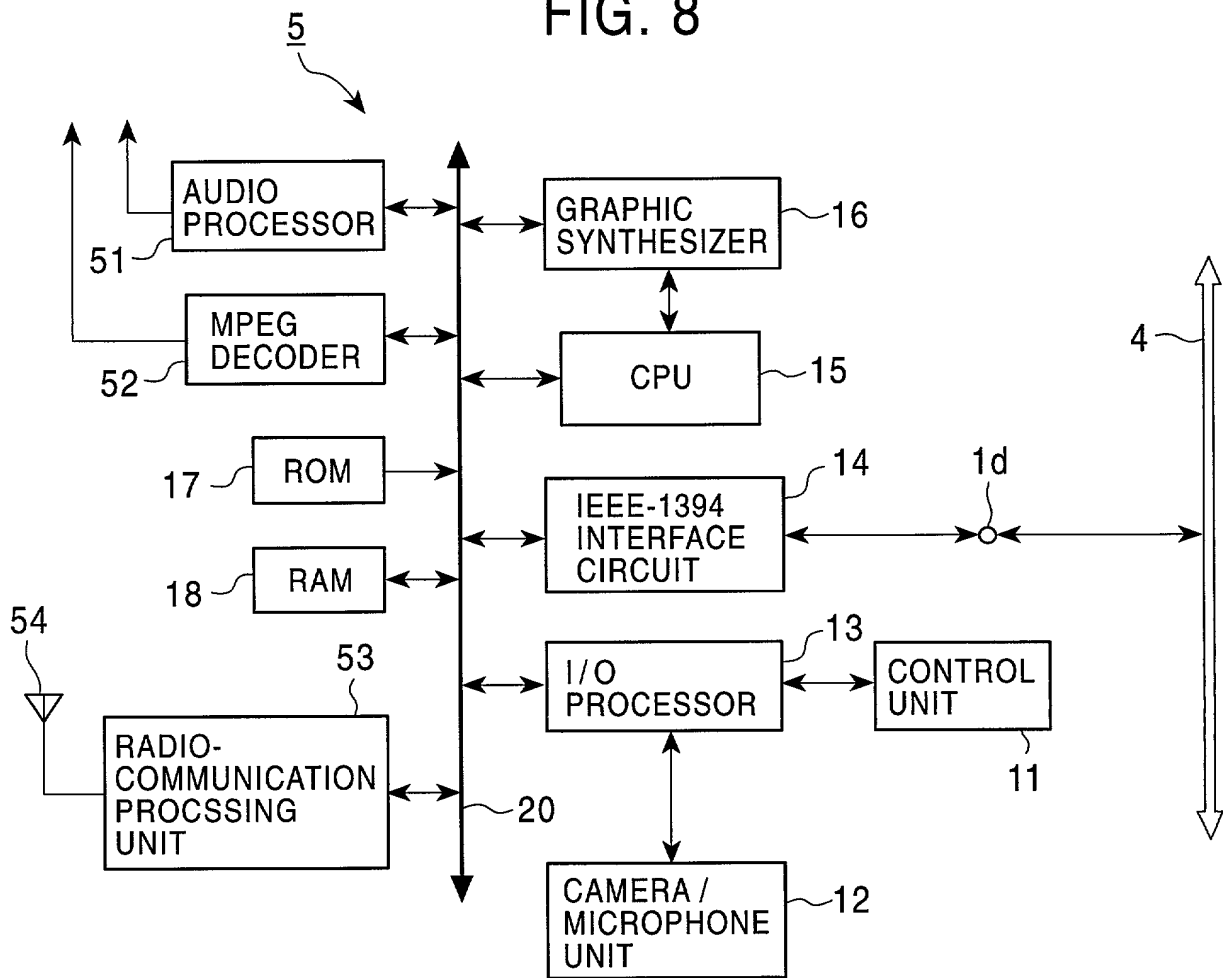


FIG. 9

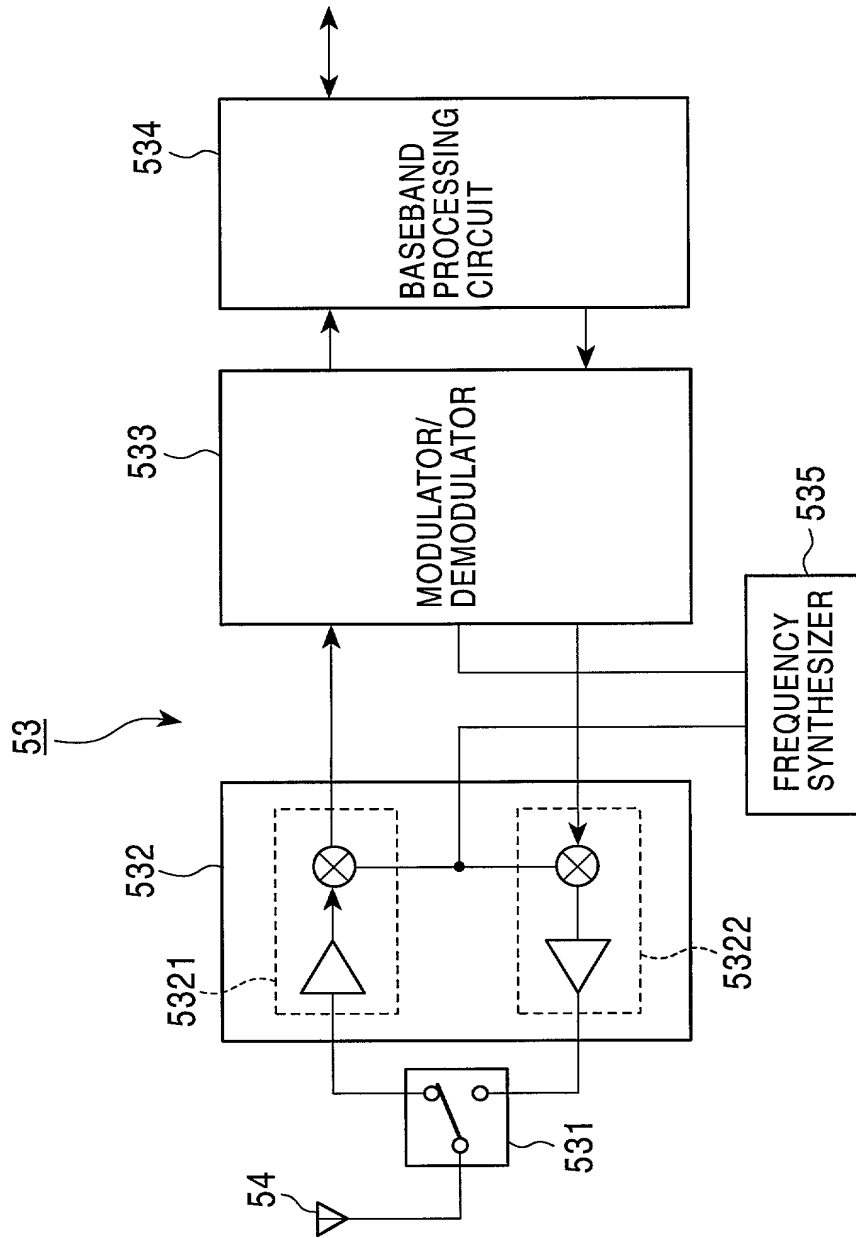


FIG. 10


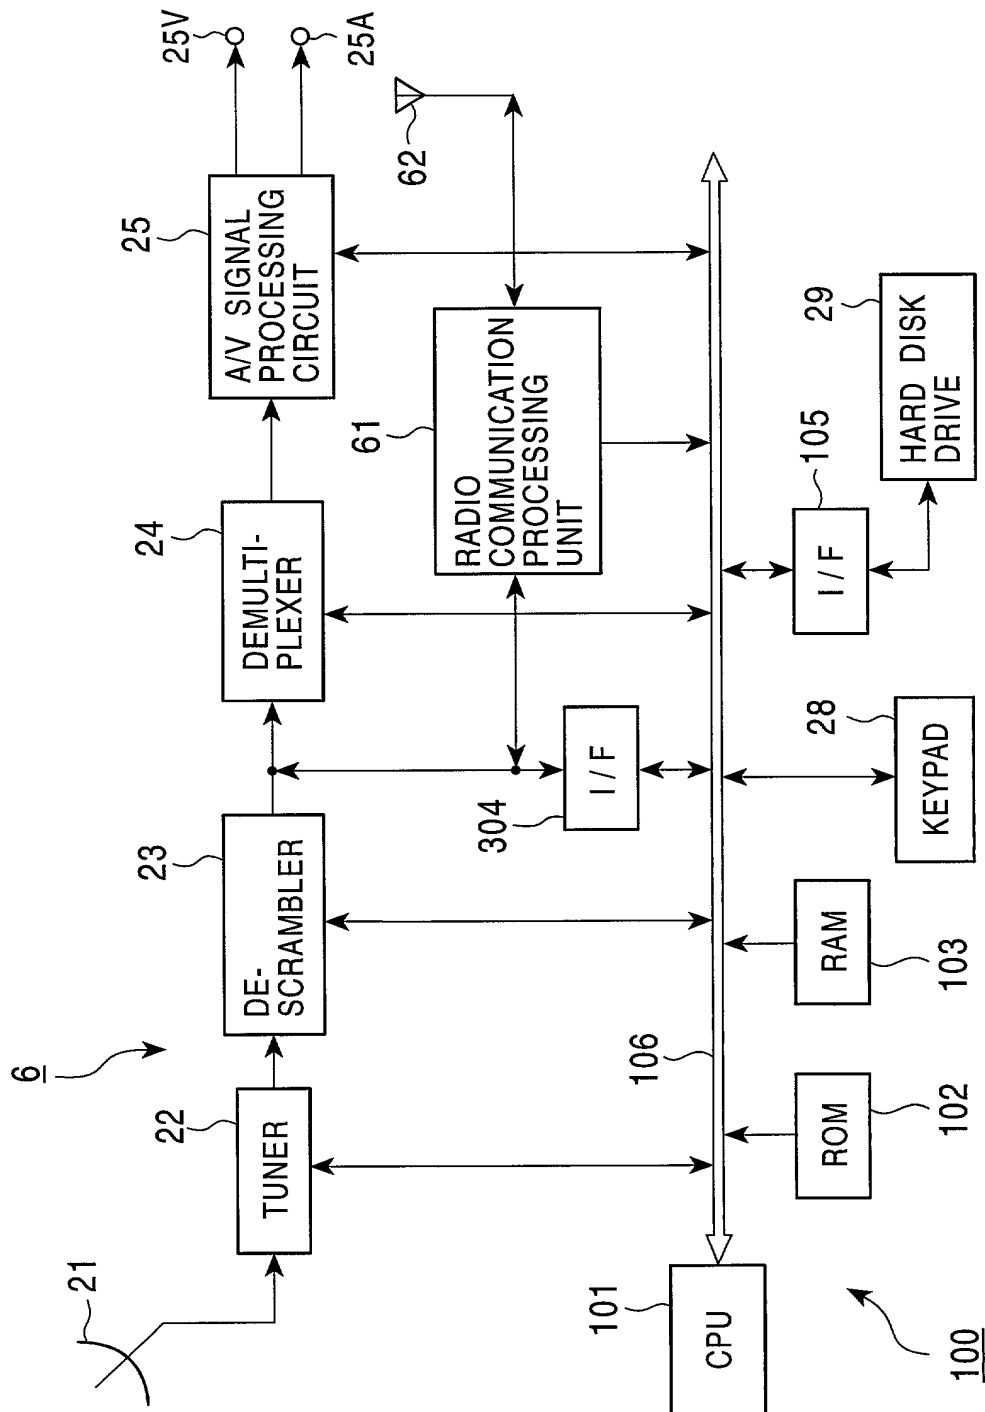


FIG. 11

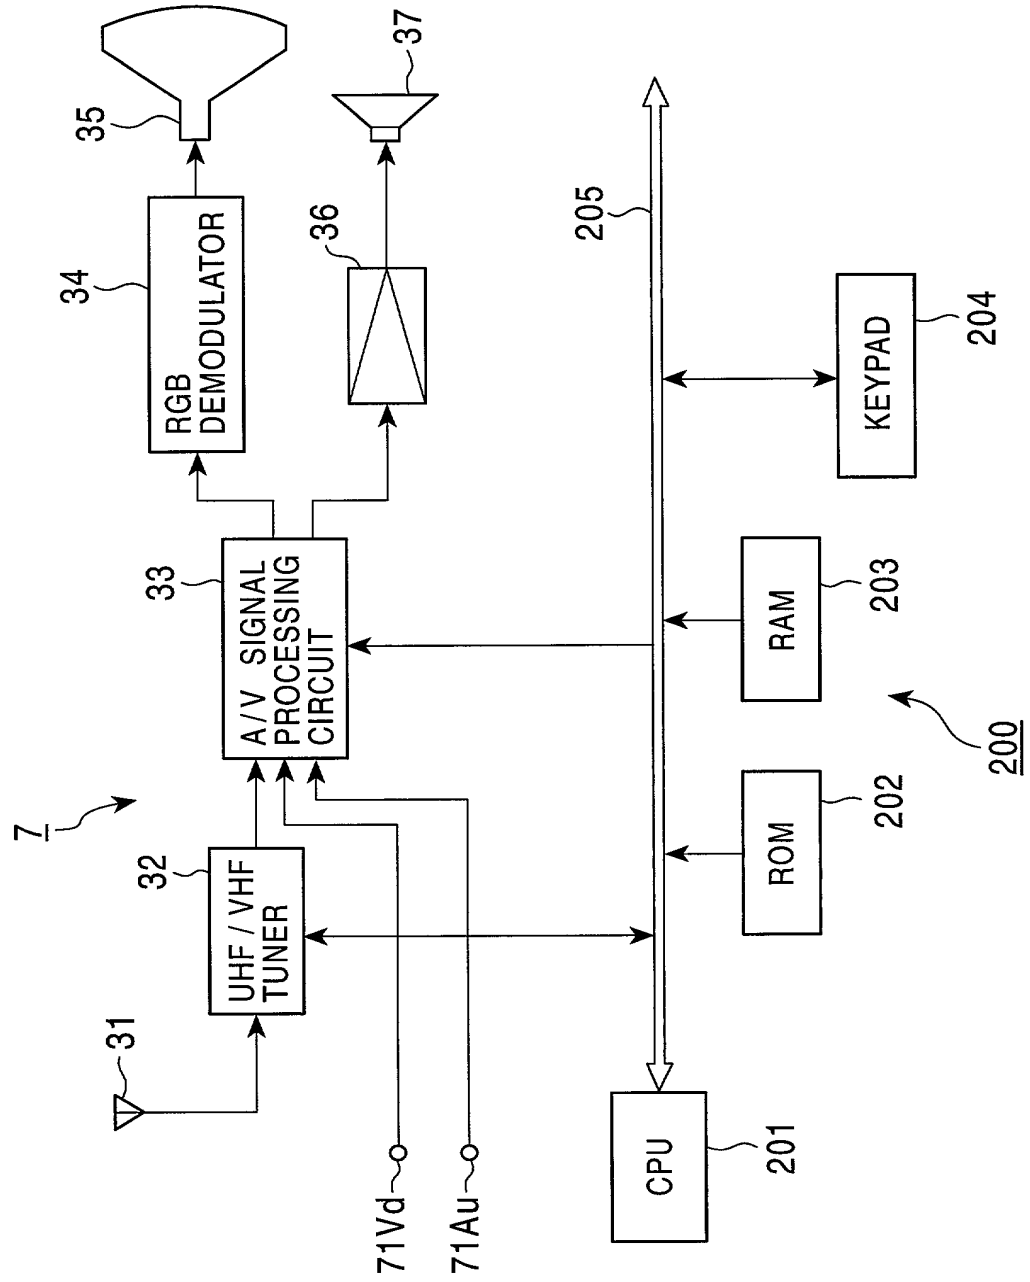

SONY-U0362

## Declaration and Power of Attorney For Patent Application

## 特許出願宣言書及び委任状

## Japanese Language Declaration

## 日本語宣言書

下記の氏名の発明者として、私は以下の通り宣言します。	As a below named inventor, I hereby declare that:
私の住所、私書箱、国籍は下記の私の氏名の後に記載された通りです。	My residence, post office address and citizenship are as stated next to my name.
下記の名称の発明に関して請求範囲に記載され、特許出願している発明内容について、私が最初かつ唯一の発明者（下記の氏名が一つの場合）もしくは最初かつ共同発明者であると（下記の名称が複数の場合）信じています。  	I believe I am the original, first and sole inventor (if only one named is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled.  <u>GAME MACHINE SYSTEM, SERVER DEVICE, GAME EXECUTING DEVICE, DISPLAY DEVICE AND METHOD OF USING GAME</u>
上記発明の明細書（下記の欄でx印がついていない場合は、本書に添付）は、  <input type="checkbox"/> 月 日に提出され、米国出願番号または特許協定条約国際出願番号を _____ とし、 （該当する場合） _____ に訂正されました。	the specification of which is attached hereto unless the following box is checked:  <input type="checkbox"/> was filed on _____ as United States Application Number or PCT International Application Number _____ and was amended on _____ (if applicable).
私は、特許請求範囲を含む上記訂正後の明細書を検討し、内容を理解していることをここに表明します。	I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.
私は、連邦規則法典第37編第1条56項に定義されとおり、特許資格の有無について重要な情報を開示する義務があることを認めます。	I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56.
私は、米国法典第35編119条(a)-(d)項又は365条(b)項に基づき下記の、米国以外の国の少なくとも一カ国を指定している特許協力条約365(a)項に基づき国際出願、又は外国での特許出願もしくは発明者証の出願についての外国優先権をここに主張するとともに、優先権を主張している、本出願の前に出願された特許または発明者証の外国出願を以下に、枠内をマークすることで、示しています。	I hereby claim foreign priority under Title 35, United States Code, Section 119(a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate, or 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or PCT International application having a filing date before that of the application on which priority is claimed.
Prior Foreign Application(s) 外国での先行出願  P11-312073 _____ Japan _____ (Number) (Country) (番号) (国名)  _____ (Number) (Country) (番号) (国名)	Priority Not Claimed 優先権主張なし  2 November 1999 _____ (Day/Month/Year Filed) (出願年月日)  _____ (Day/Month/Year Filed) (出願年月日)
私は、第35編米国法典119条(e)項に基づいて下記の米国特許出願規定に記載された権利をここに主張いたします。  _____ (Application No.) (Filing Date) (出願番号) (出願日)	I hereby claim the benefit under Title 35, United States Code, Section 119(e) of any United States provisional application(s) listed below.  _____ (Application No.) (Filing Date) (出願番号) (出願日)

## Declaration and Power of Attorney For Patent Application

## 特許出願宣言書及び委任状

## Japanese Language Declaration

## 日本語宣言書

私は、下記の米国法典第35編120条に基づいて下記の米特許出願に記載された権利、又は米国を指定している特許協力条約365条(c)に基づく権利をここに主張します。また、本出願の各請求範囲の内容が米国法典第35編112条第1項又は特許協力条約で規定された方法で先行する米特許出願に開示されていない限り、その先行米出願書提出日以降で本出願書の日本国内または特許協力条約国際提出日までの期間中に入手された、連邦規則法典第37編1条56項で定義された特許資格の有無に関する重要な情報について開示義務があることを認識しています。

(Application No.)

(出願番号)

(Filing Date)

(出願日)

I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s), or 365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of Title 35, United States Code, Section 112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of application.

(Status: Patented, Pending, Abandoned)

(現況: 特許許可済、係属中、放棄済)

(Application No.)

(出願番号)

(Filing Date)

(出願日)

(Status: Patented, Pending, Abandoned)

(現況: 特許許可済、係属中、放棄済)

私は、私自身の知識に基づいて本宣言書中で私が行なう表明が真実であり、かつ私の入手した情報と私の信じることに基づく表明が全て真実であると信じていること、さらに故意になされた虚偽の表明及びそれと同等の行為は米国法典第18編第1001条に基づき、罰金または拘禁、もしくはその両方により処罰されること、そしてそのような故意による虚偽の声明を行なえば、出願した、又は既に許可された特許の有効性が失われることを認識し、よってここに上記のごとく宣誓を致します。

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may be jeopardize the validity of the application or any patent issued thereon.

委任状: 私は下記の発明者として、本出願に関する一切の手続きを米特許商標局に対して遂行する弁理士または代理人として、下記の者を指名いたします。(弁理士、または代理人の氏名及び登録番号を明記のこと)

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark office connected therewith (*list name and registration number*)

Karl A. Limbach 18,689  
George C. Limbach 19,305  
John K. Uilkema 20,282  
Neil A. Smith 25,441  
Veronica C. Devitt 29,375  
Ronald L. Yin 27,607  
Gerald T. Sekimura 30,103  
Michael A. Stallman 29,444  
Philip A. Girard 28,848  
Michael J. Pollock 29,098

Steven M. Everett 30,050  
Alfred A. Equitz 30,922  
Charles P. Sammut 28,901  
Mark C. Pickering 36,239  
Patricia Coleman James 37,155  
Kathleen A. Frost 37,326  
Alan A. Limbach 39,749  
Douglas C. Limbach 35,249  
Seong-Kun Oh\* 41,815  
Kyla L. Harriel  
\* Recognition under 37 CFR 10 9(b)

Mayumi Maeda 40,075  
Charles L. Hamilton 42,624  
Andrew V. Smith 43,132  
Eric N. Hoover 37,355  
Frank J. Mycroft 46,946  
Robert M. McConnell 46,912  
J. Thomas McCarthy 22,420  
Joel G. Ackerman 24,307  
Roger S. Sampson 44,314  
Susan M. Schmitt 34,427  
Edward B. Weller 37,468

## 書類送付先

Send Correspondence to:

Charles P. Sammut, Esq.  
Limbach & Limbach L.L.P.  
2001 Ferry Building  
San Francisco, CA 94111-4262

# Declaration and Power of Attorney For Patent Application

特許出願宣言書及び委任状

## Japanese Language Declaration

日本語宣言書

直接電話連絡先： (名前及び電話番号)	Direct Telephone Calls to: (name and telephone number)  <b>Charles P. Sammut</b> <b>(415) 433-4150</b>
唯一または第一発明者名	Full name of sole or first inventor:  AKIHIRO YAMADA
発明者の署名	Inventor's signature
住所	Residence  Saitama, Japan
国籍	Citizenship  Japan
私書箱	Post Office Address  c/o SONY CORPORATION 7-35, Kitashinagawa 6-chome Shinagawa-ku, Tokyo, 141-0001 JAPAN